




US 20170089128A1


(19) **United States**(12) **Patent Application Publication**
WHEELER(10) **Pub. No.: US 2017/0089128 A1**(43) **Pub. Date: Mar. 30, 2017**(54) **ENERGY-HARVESTING CHROMOGENIC DEVICES****G02F 1/01** (2006.01)**G02F 1/153** (2006.01)(71) Applicant: **Alliance for Sustainable Energy, LLC**,
Golden, CO (US)(52) **U.S. Cl.**CPC **E06B 9/24** (2013.01); **G02F 1/0126**
(2013.01); **G02F 1/0147** (2013.01); **G02F**
1/1533 (2013.01); **G02F 1/155** (2013.01);
H01L 51/4213 (2013.01); **E06B 2009/2476**
(2013.01); **E06B 2009/2464** (2013.01); **H01L**
51/0083 (2013.01)(72) Inventor: **Lance M. WHEELER**, Wheat Ridge,
CO (US)(21) Appl. No.: **15/279,062**(22) Filed: **Sep. 28, 2016**

(57)

ABSTRACT**Related U.S. Application Data**(60) Provisional application No. 62/234,472, filed on Sep.
29, 2015.**Publication Classification**(51) **Int. Cl.****E06B 9/24** (2006.01)**H01L 51/42** (2006.01)**G02F 1/155** (2006.01)

An aspect of the present disclosure is a device that includes a switchable material and an intercalating species, such that when a first condition is met, at least a portion of the intercalating species is associated with the switchable material and the switchable material is substantially transparent and substantially colorless, and when a second condition is met, at least a fraction of the portion of the intercalating species is transferred from the switchable material and the switchable material is substantially transparent and substantially colored.

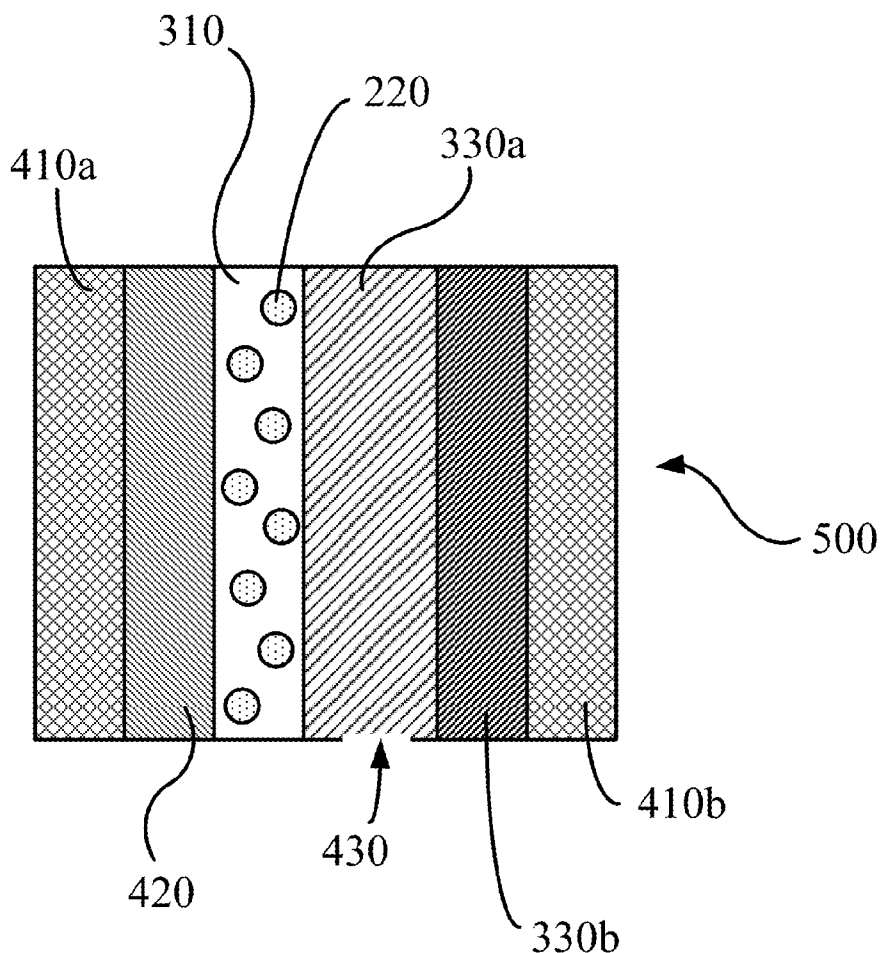

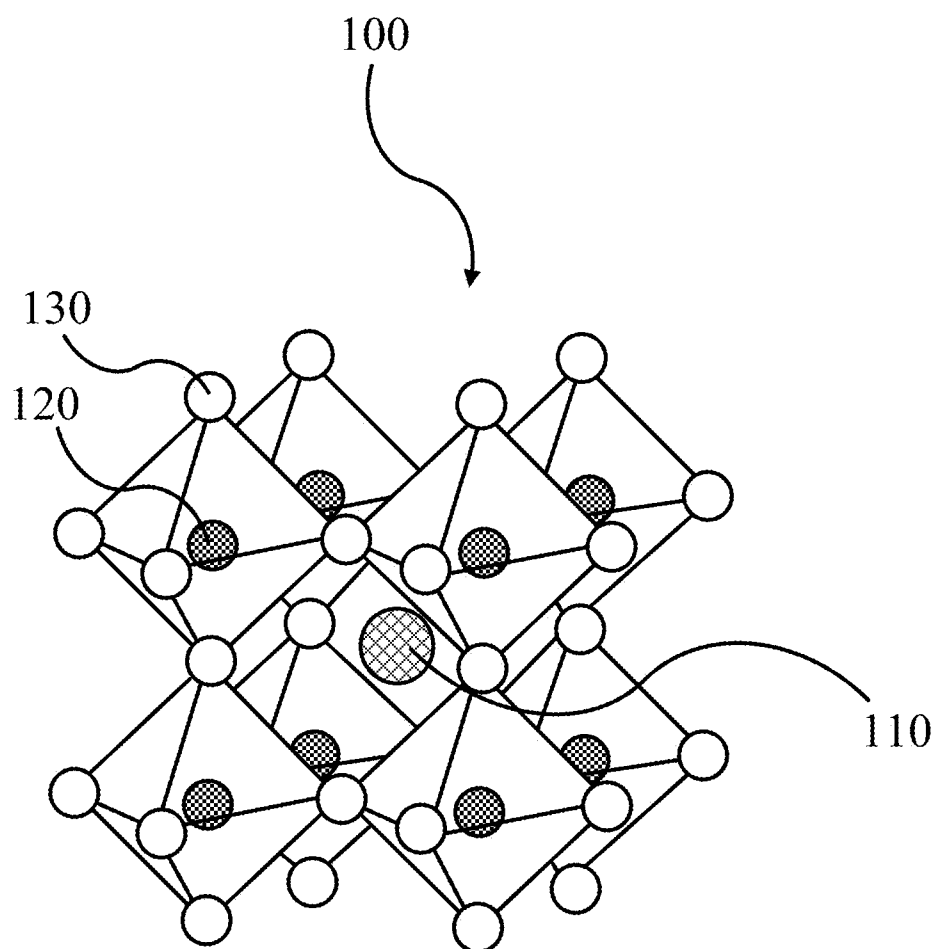**Figure 1**

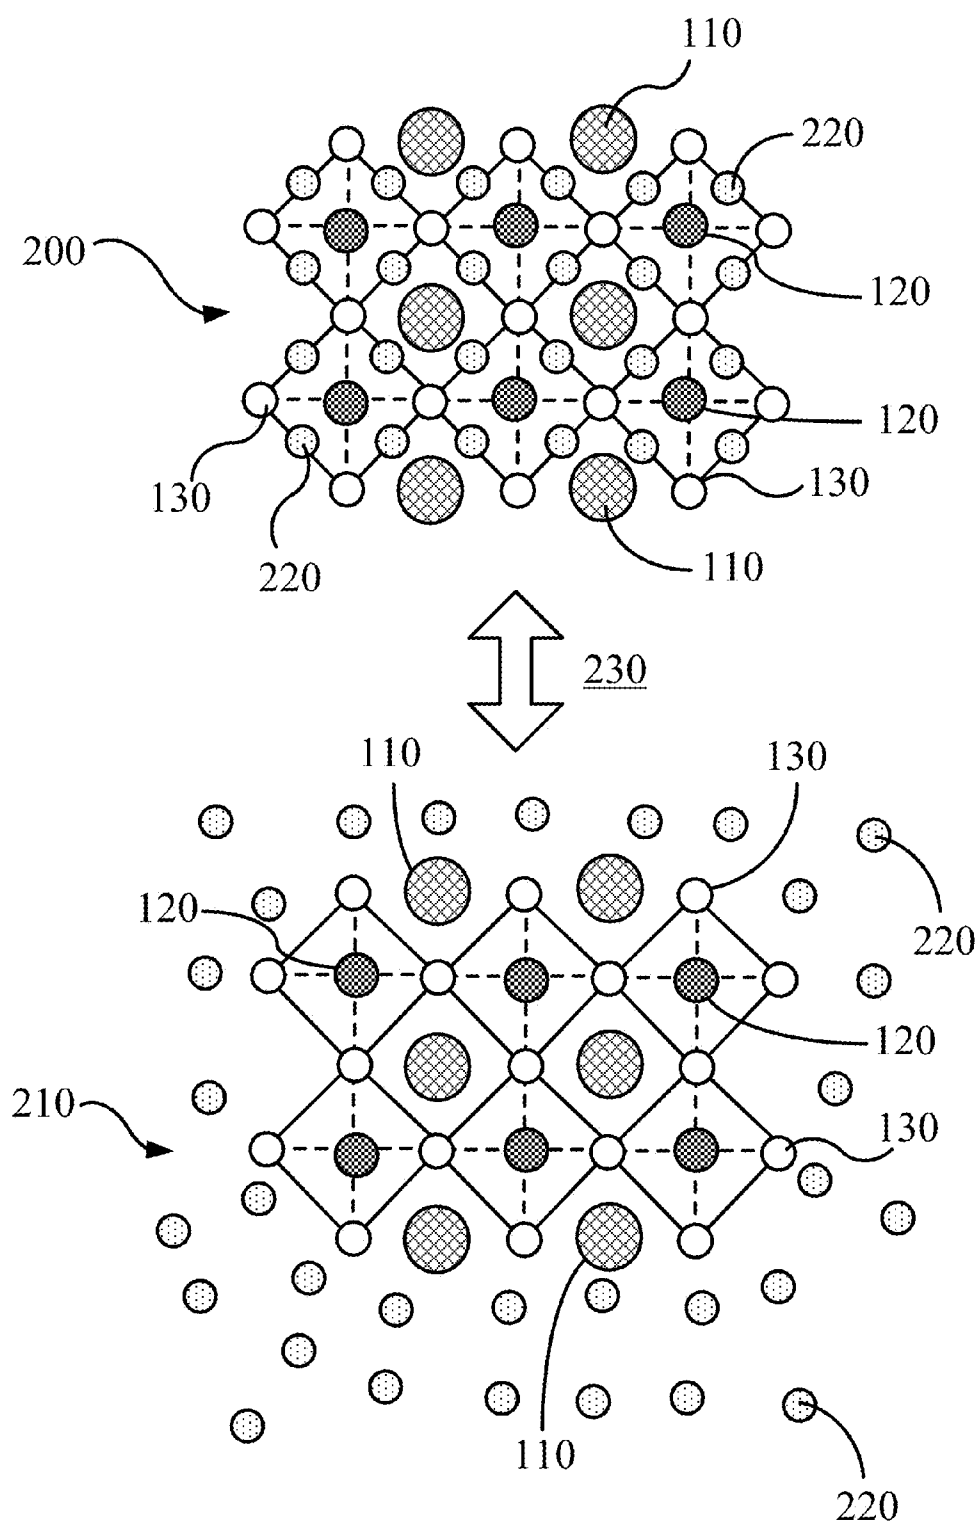


Figure 2

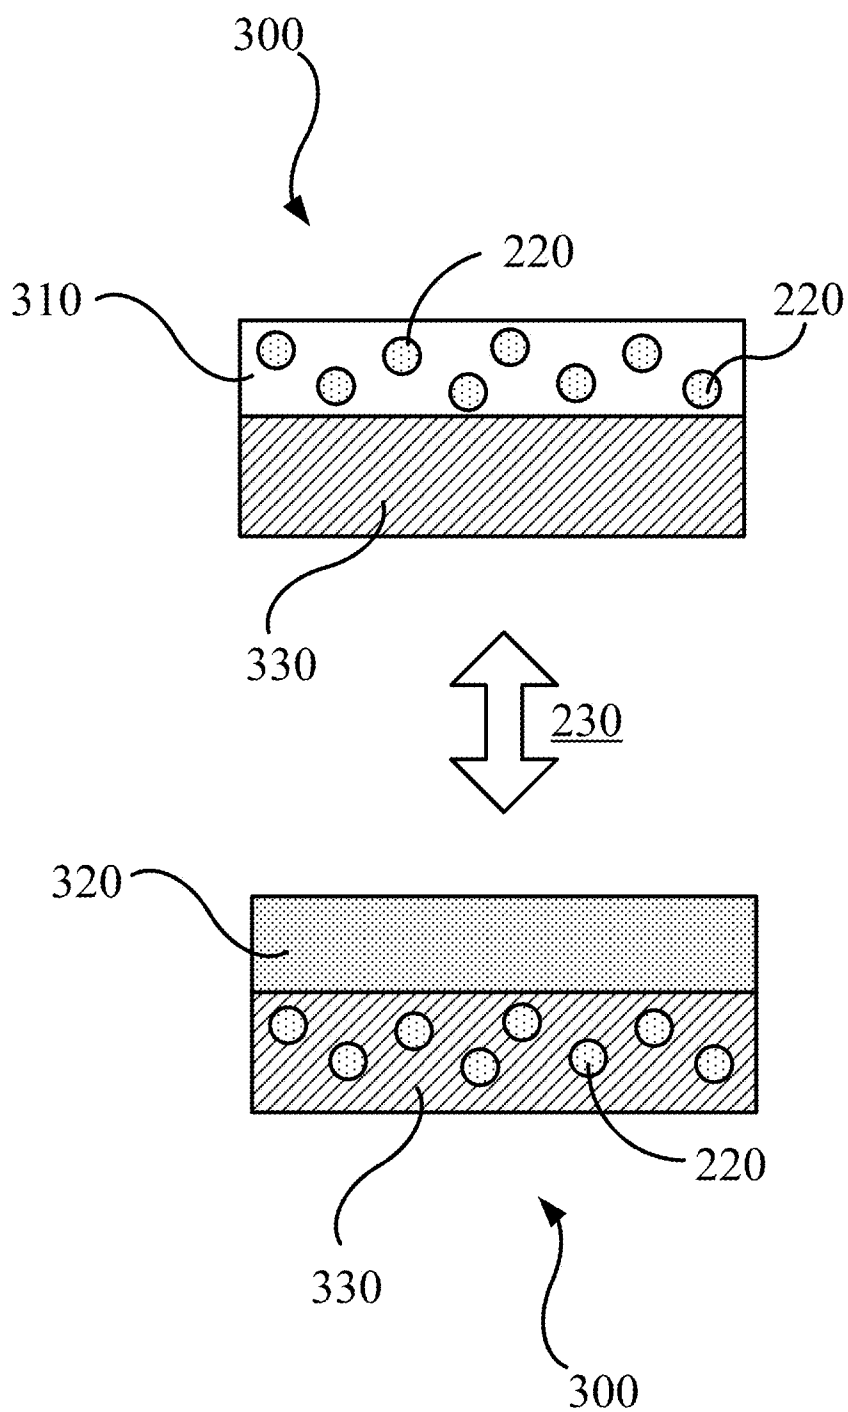


Figure 3

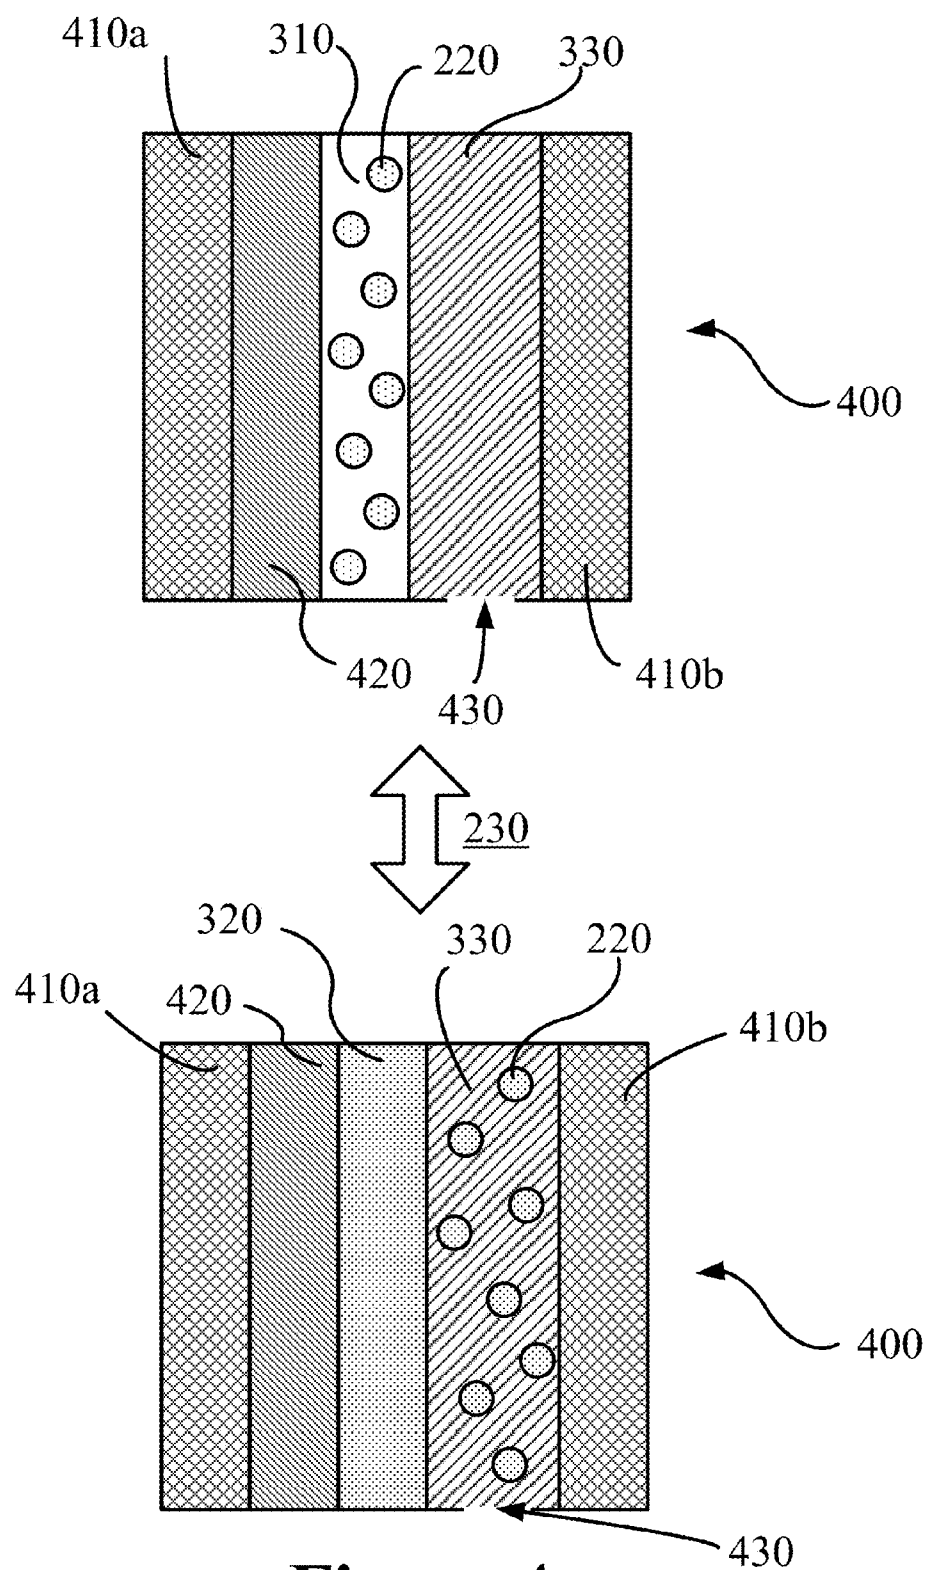


Figure 4

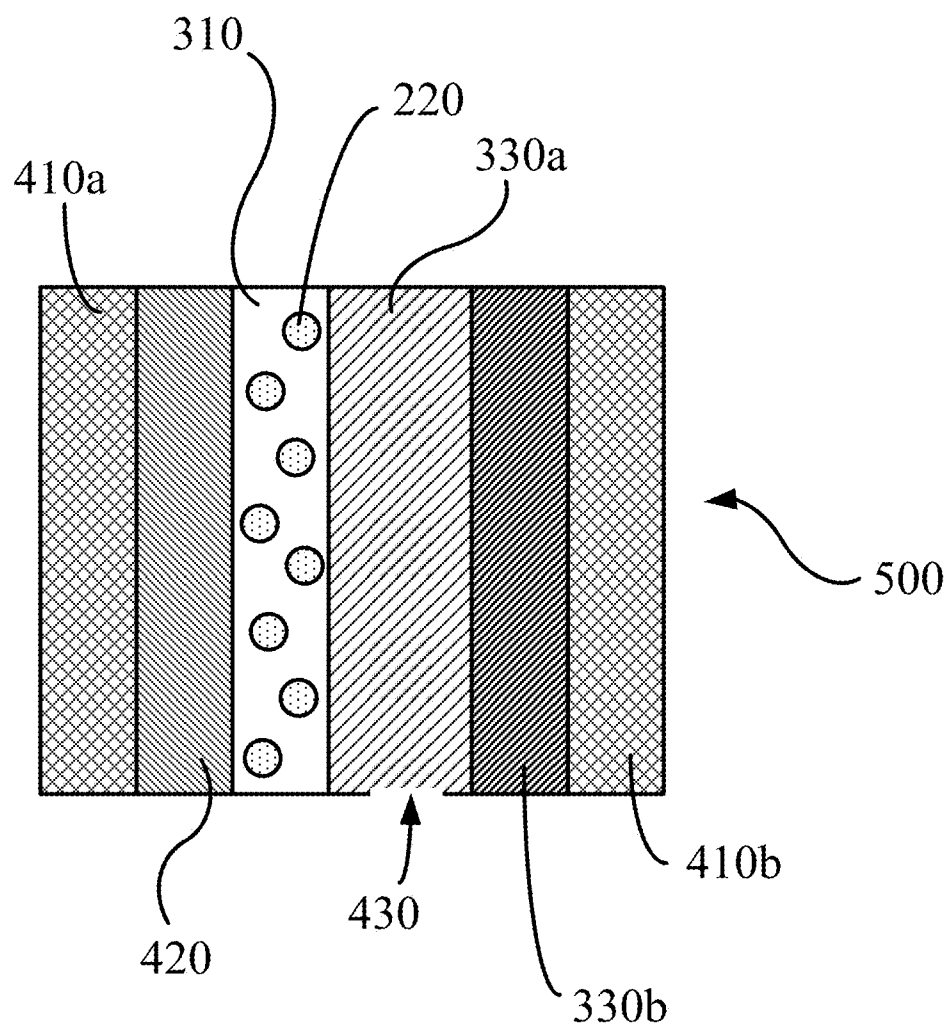


Figure 5

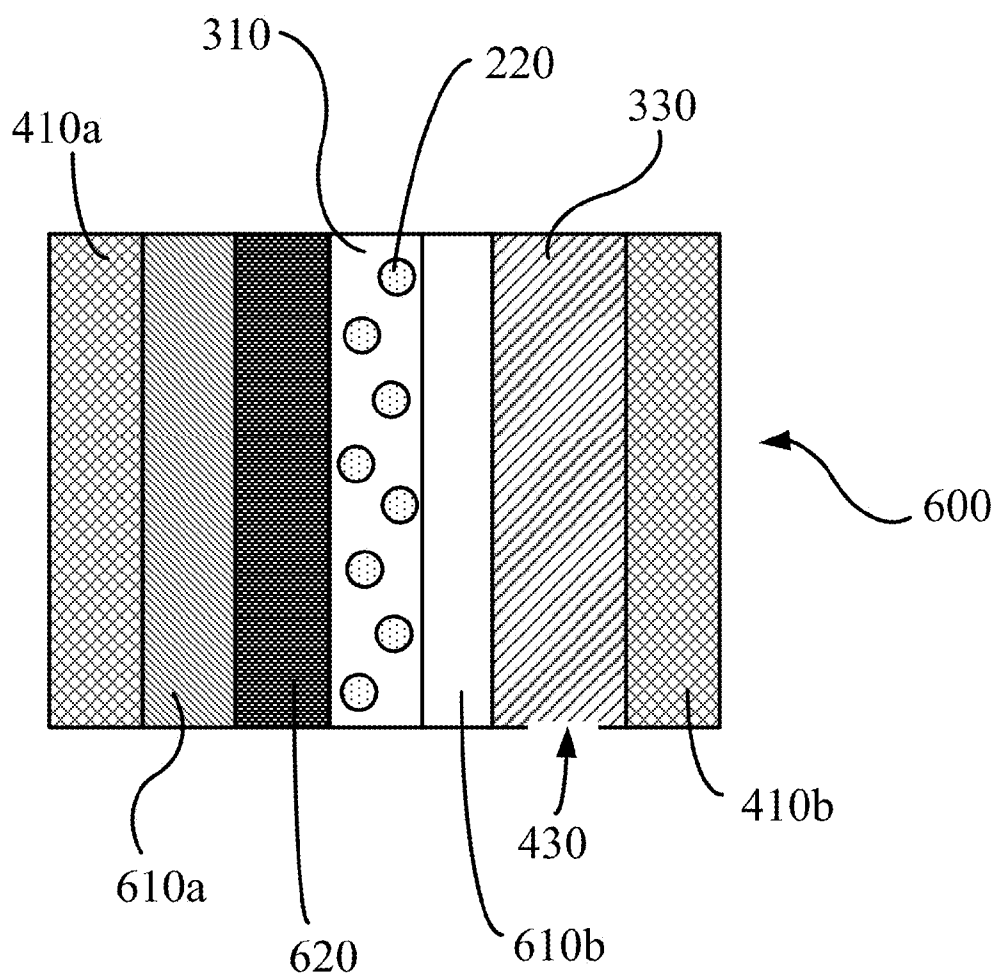


Figure 6

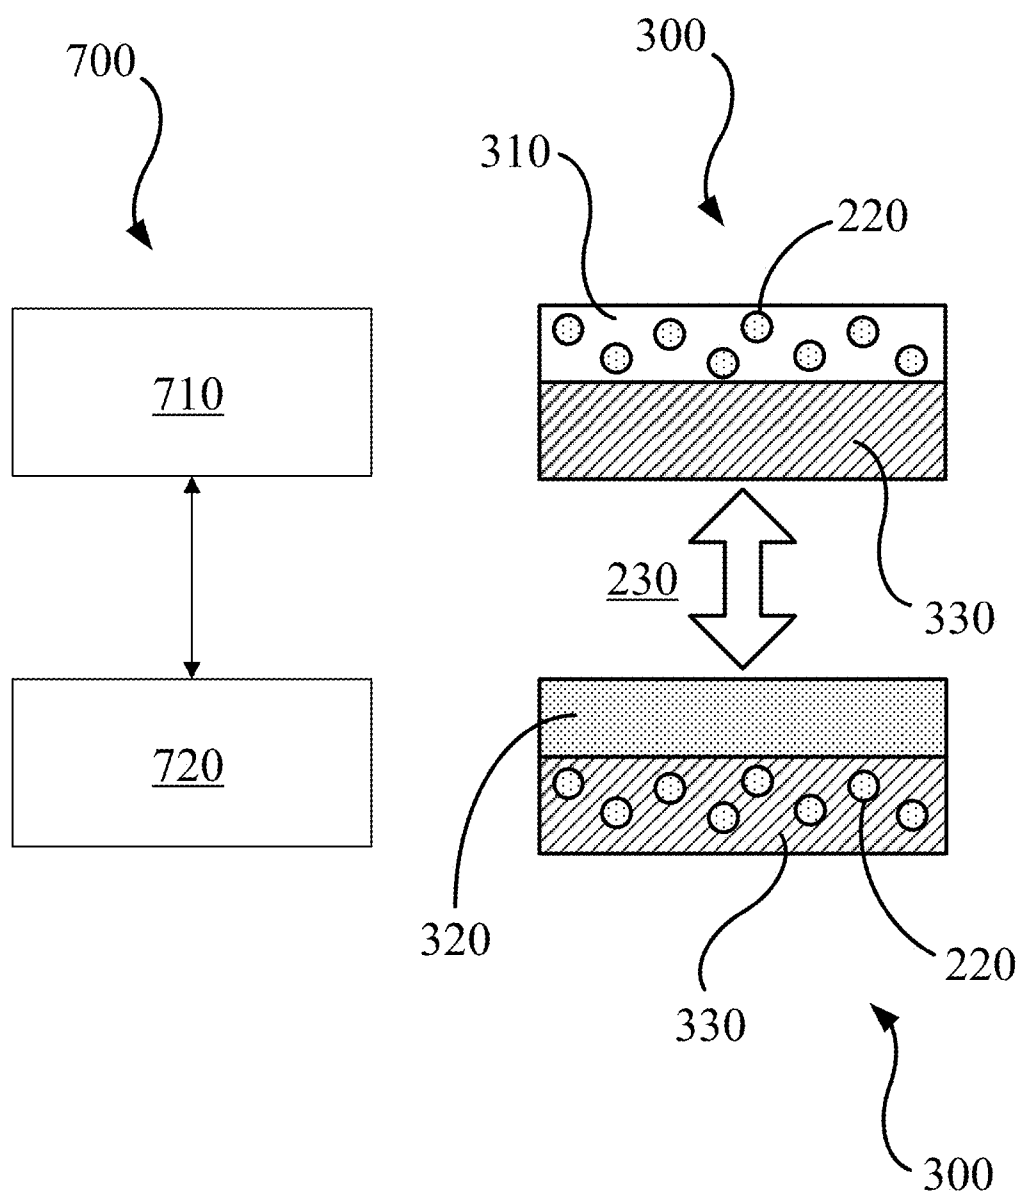


Figure 7

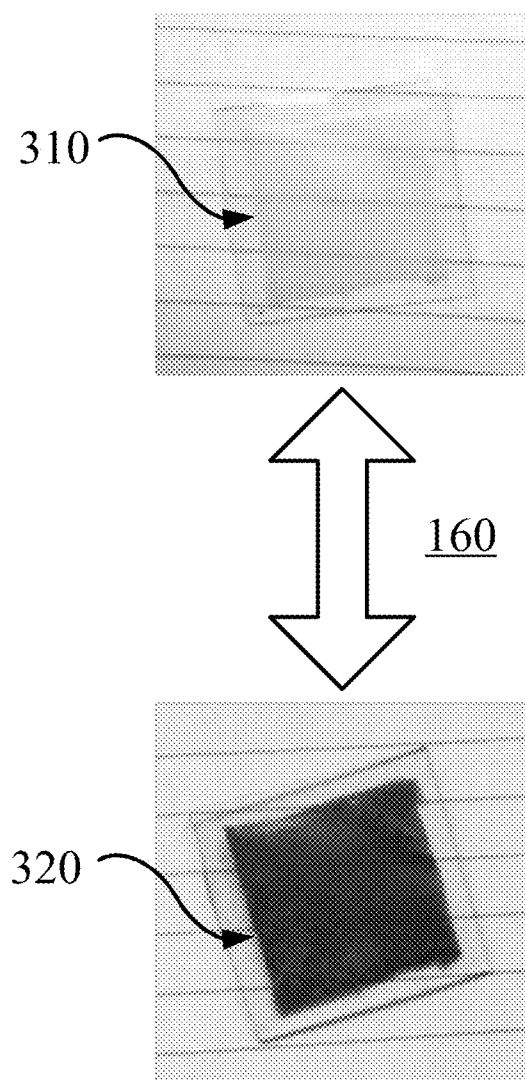


Figure 8

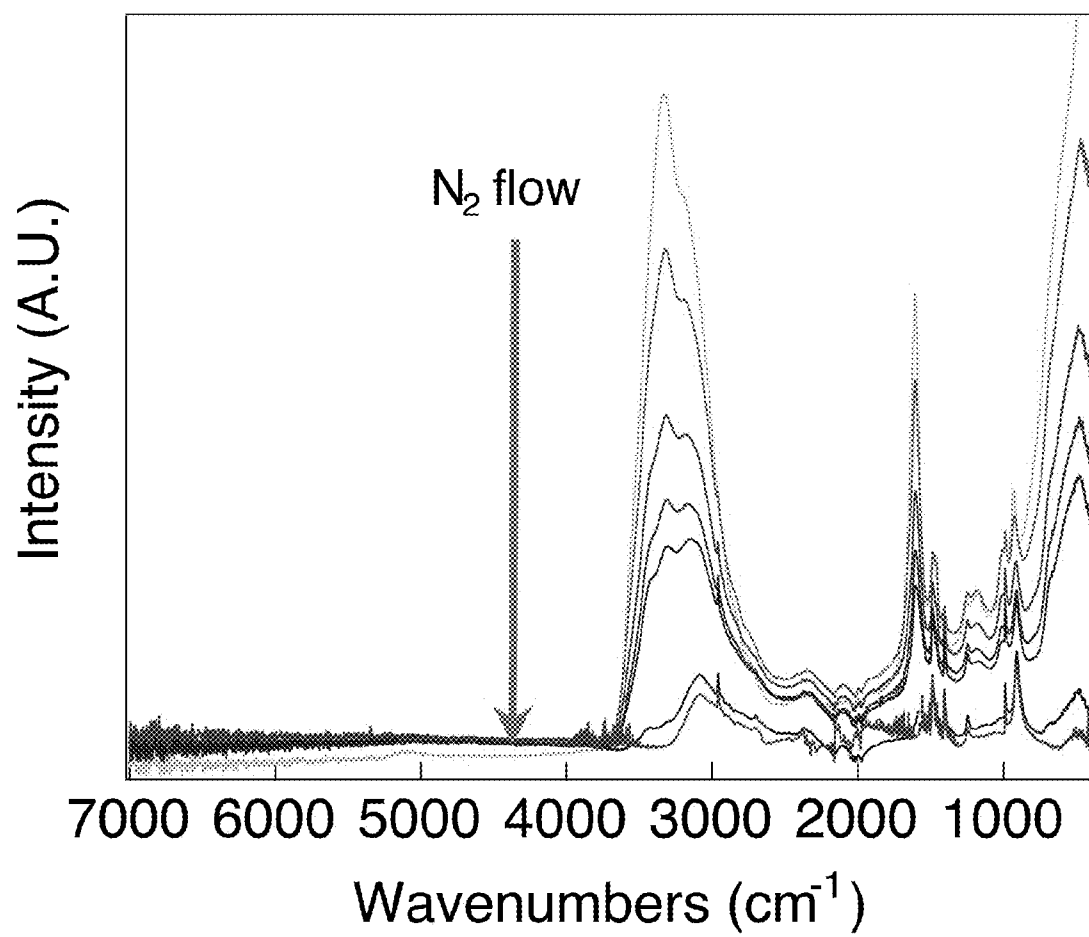


Figure 9

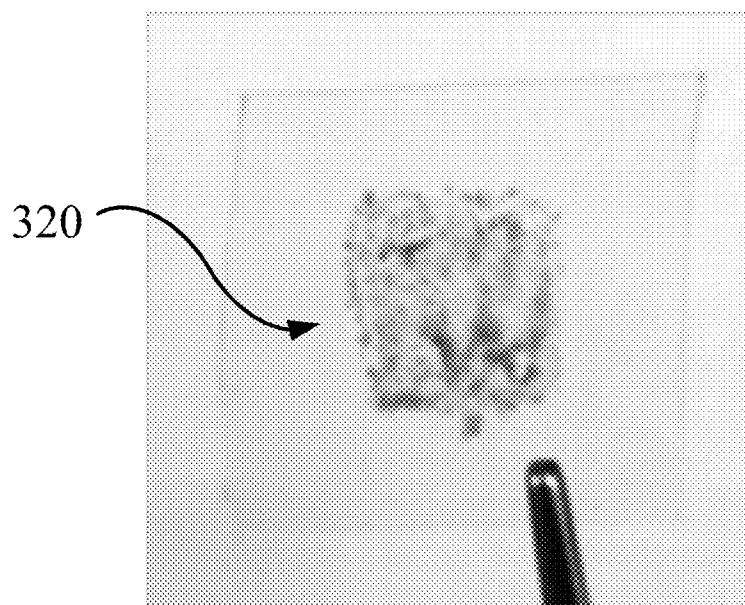


Figure 10

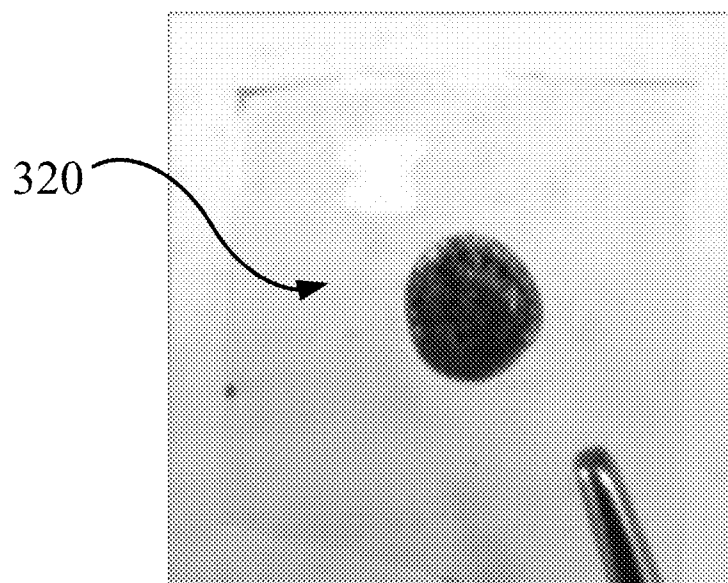


Figure 11

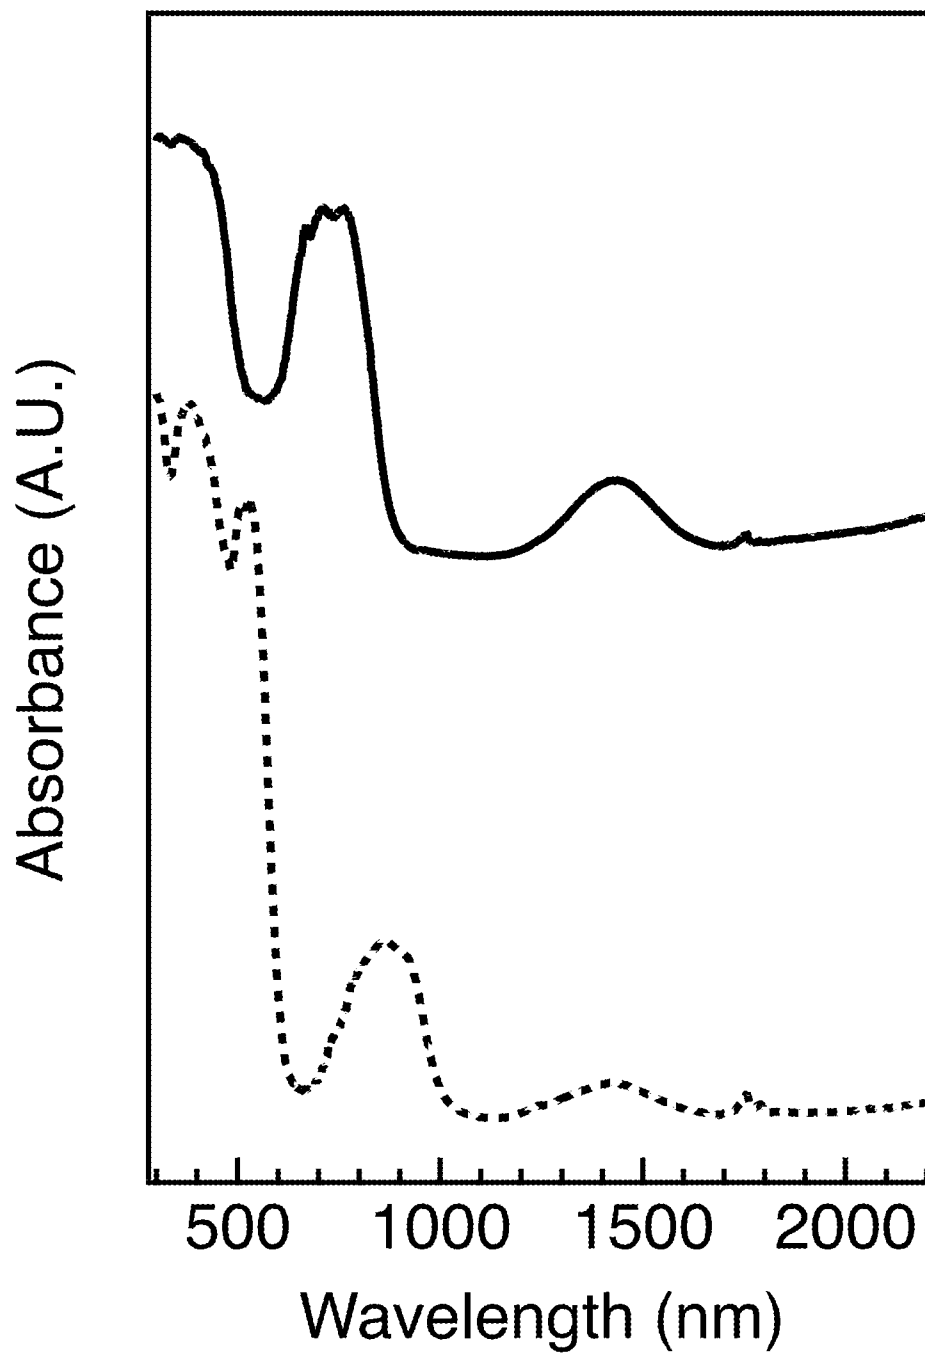


Figure 12

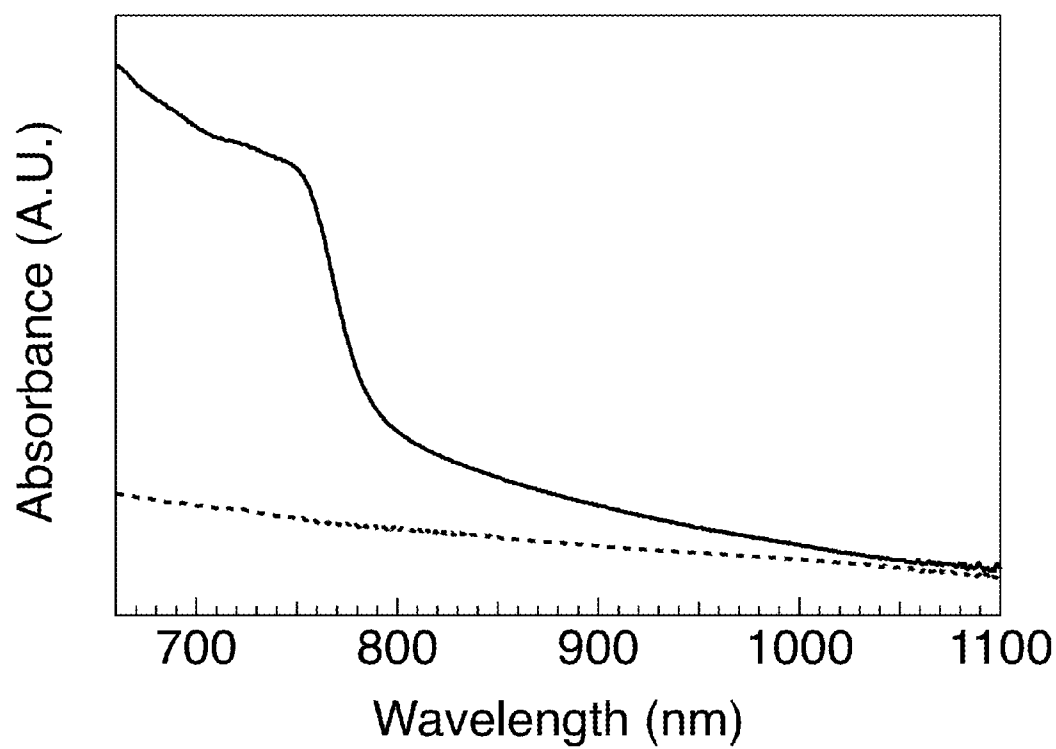


Figure 13

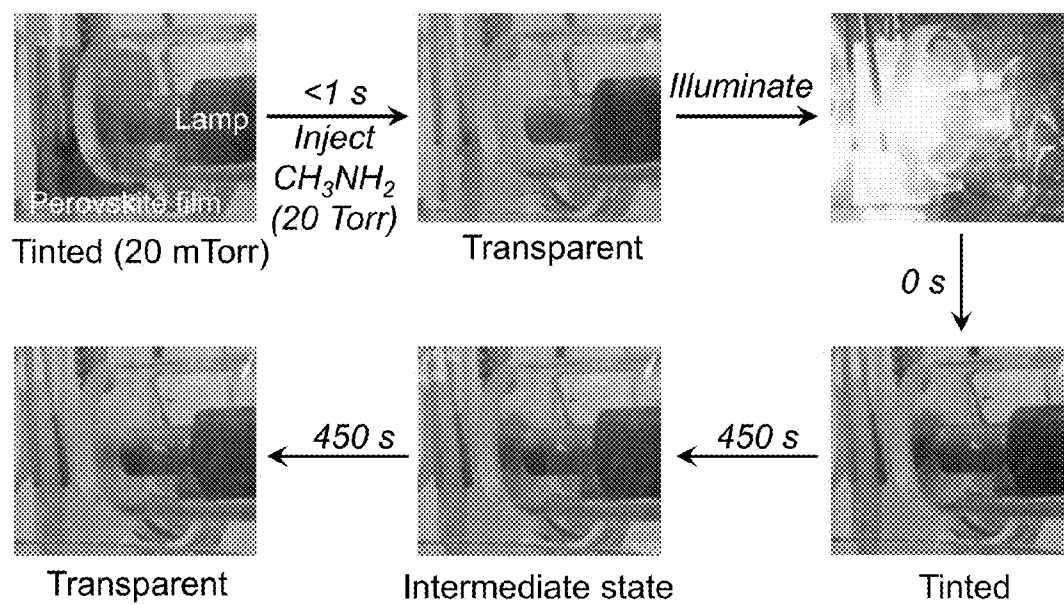


Figure 14

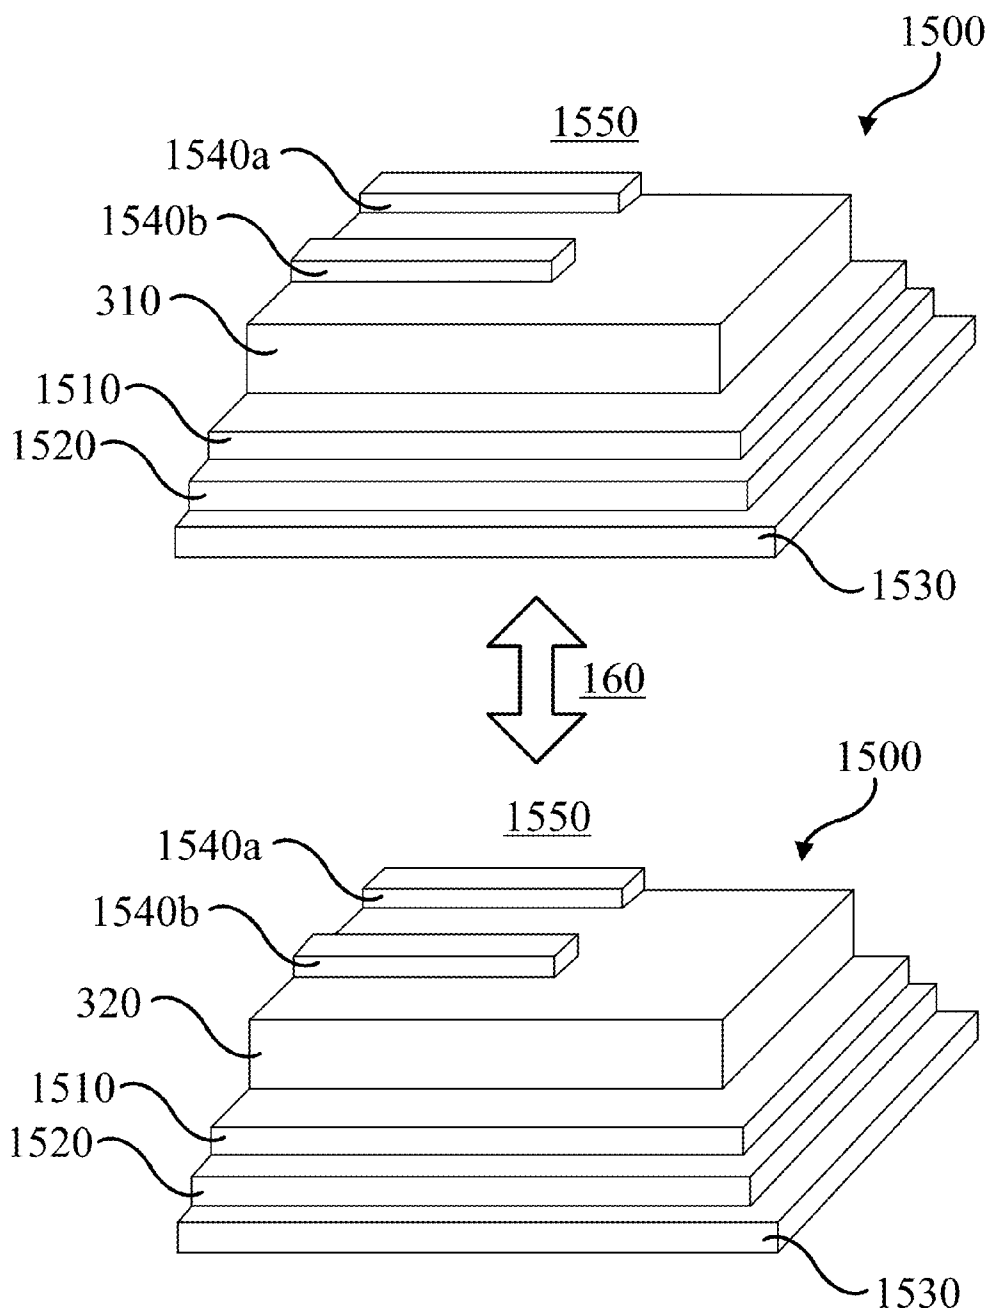


Figure 15

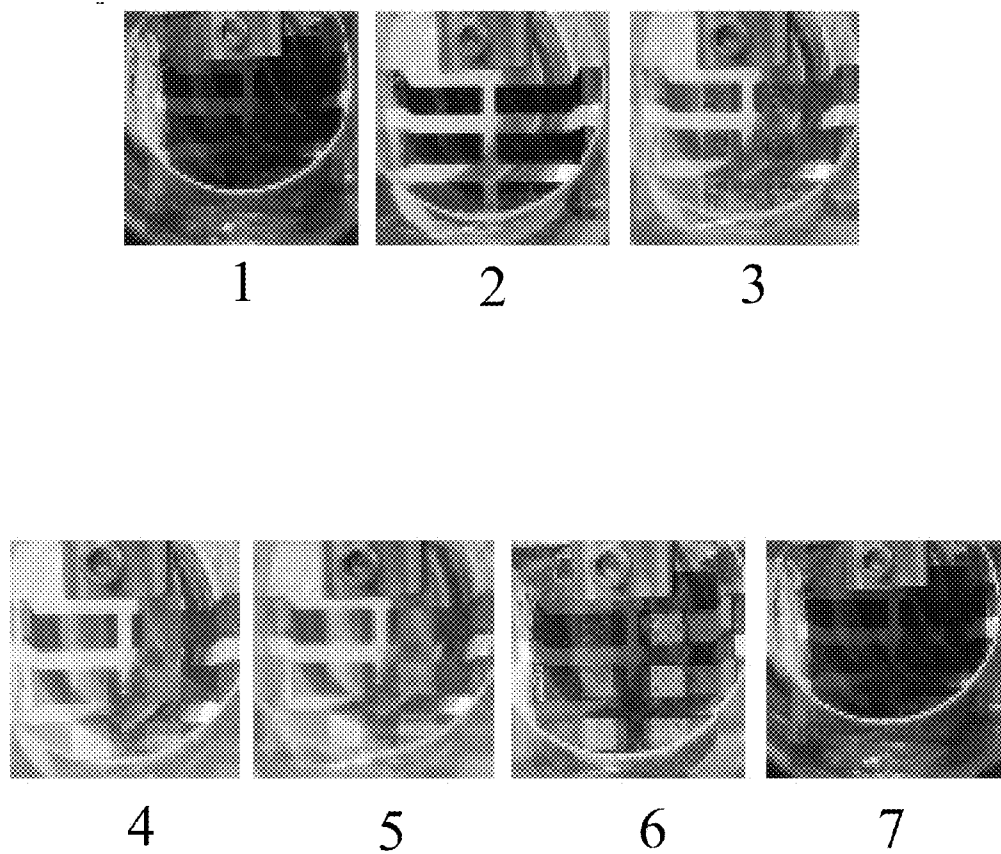


Figure 16

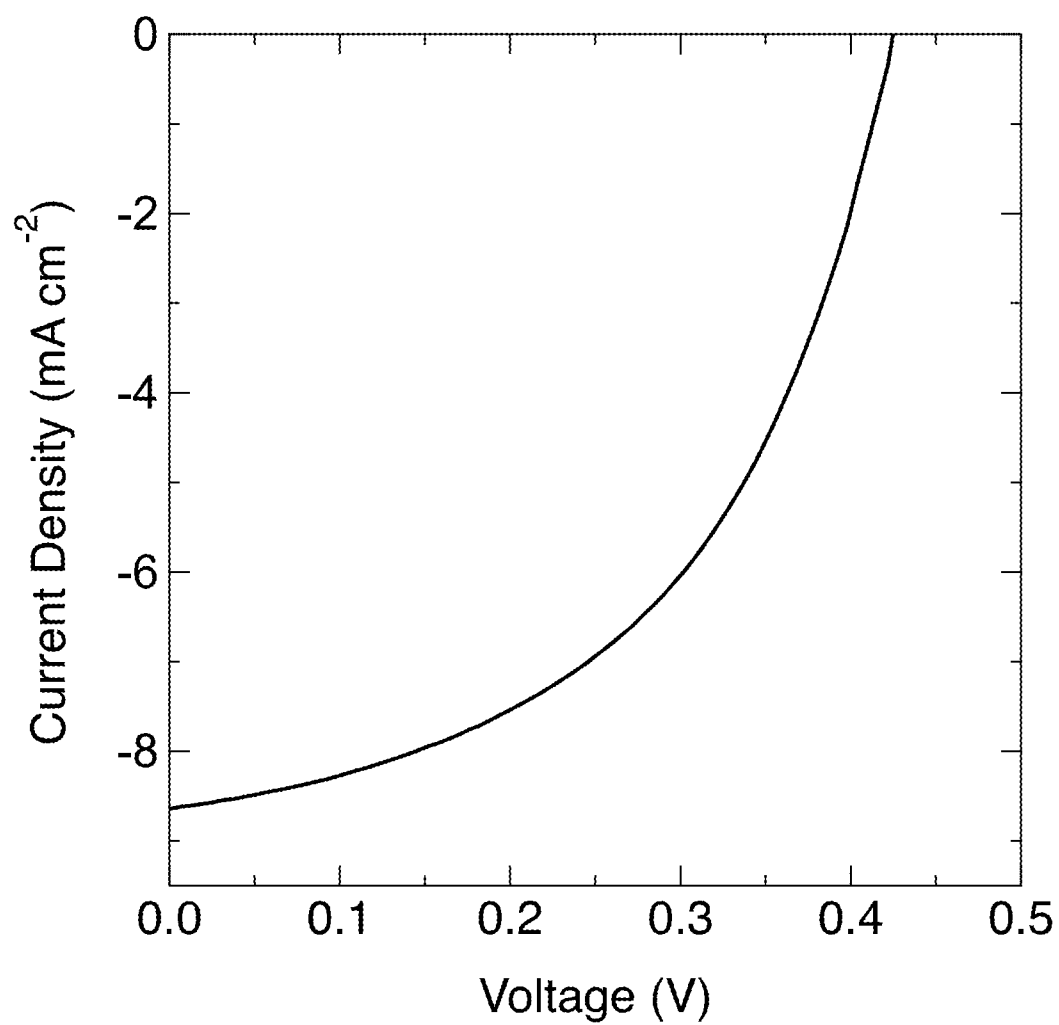


Figure 17

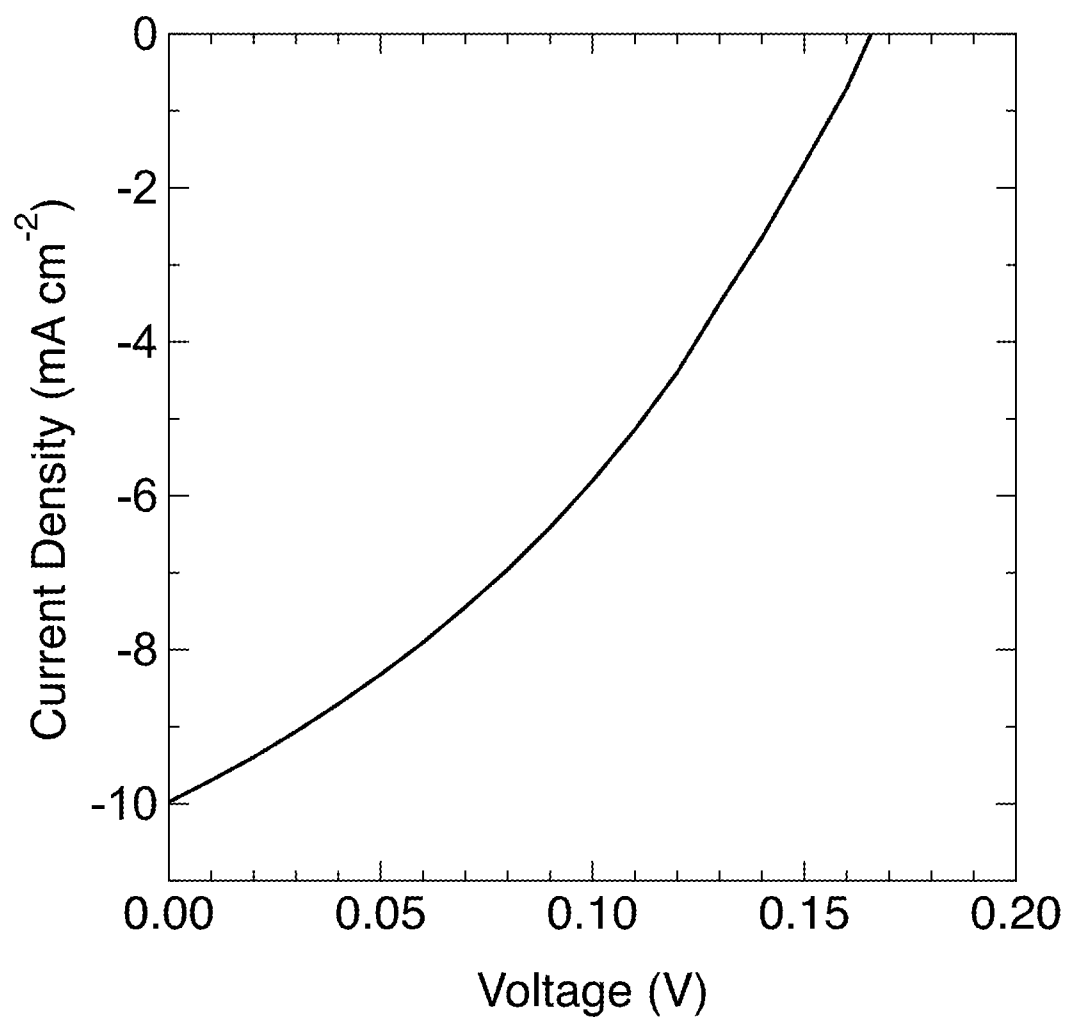


Figure 18

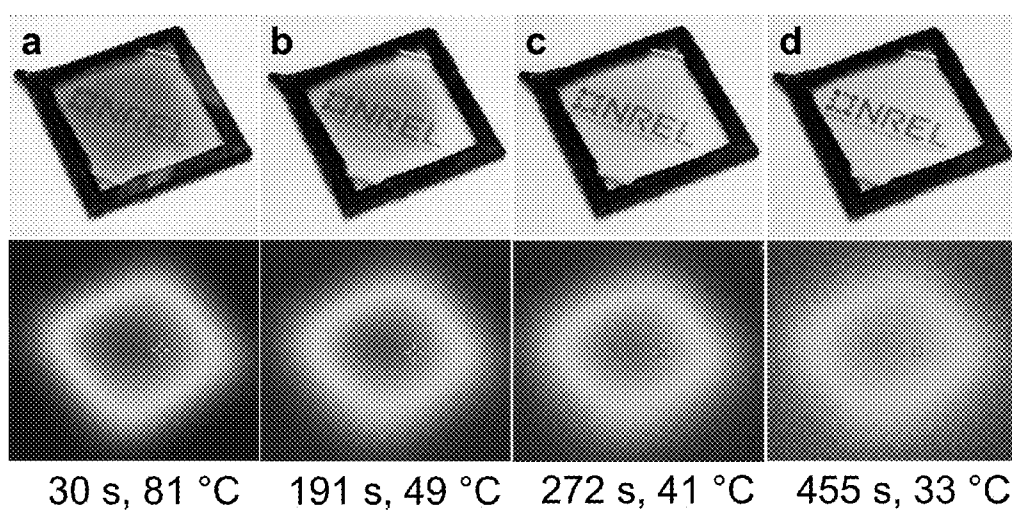
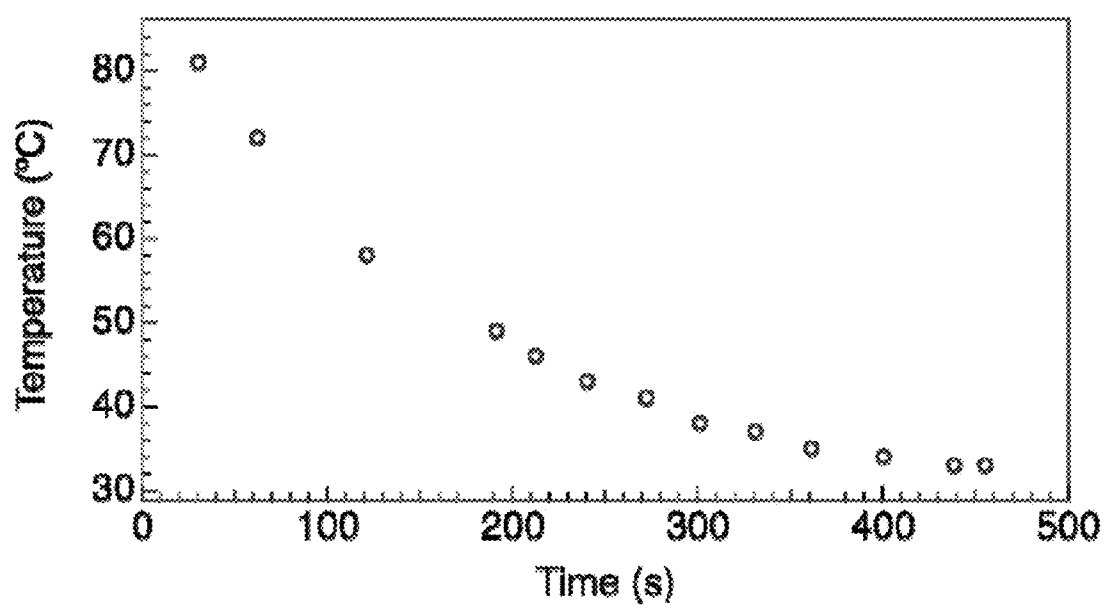


Figure 19

**Figure 20**

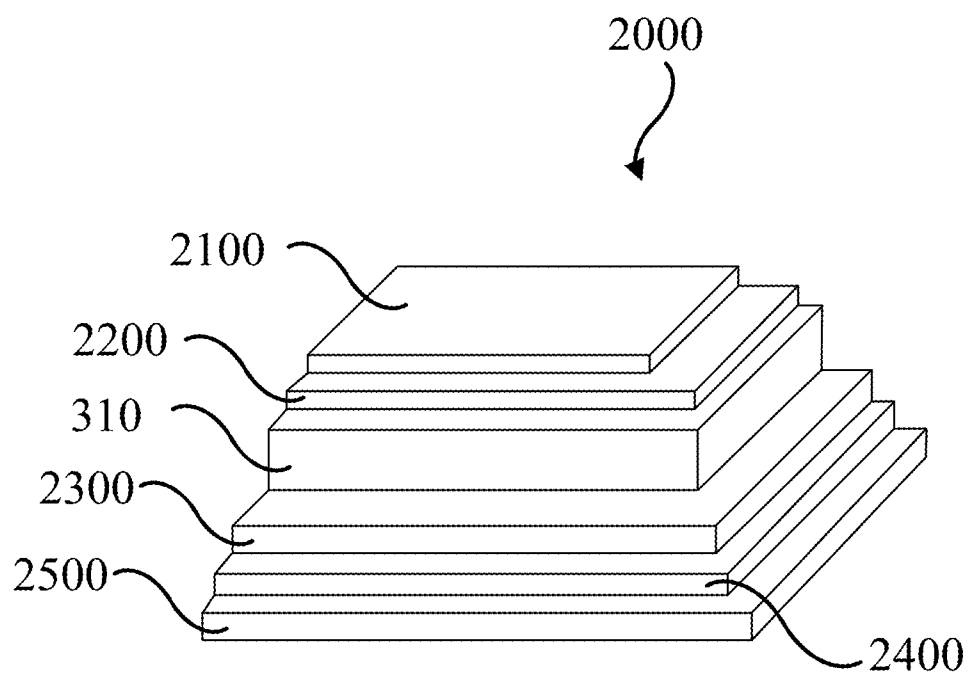


Figure 21

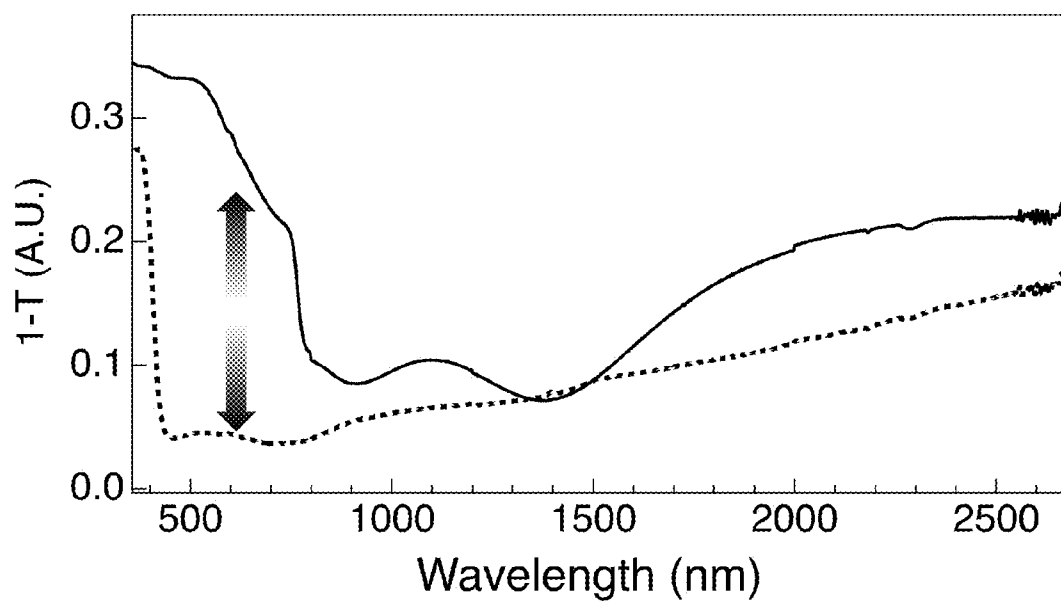


Figure 22

ENERGY-HARVESTING CHROMOGENIC DEVICES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/234,472 filed Sep. 29, 2015, the content of which is incorporated herein by reference in its entirety.

CONTRACTUAL ORIGIN

[0002] The United States Government has rights in this invention under Contract No. DE-AC36-08GO28308 between the United States Department of Energy and the Alliance for Sustainable Energy, LLC, the Manager and Operator of the National Renewable Energy Laboratory.

BACKGROUND

[0003] Buildings account for 72% of the total electricity consumption in the United States. Consumption is expected to rise to 75% by 2025. Regulating solar radiation gain through windows plays a pivotal role in decreasing building energy consumption. This is a challenging research endeavor as window energy efficiency and cost must also be balanced with the demand for large high-transmission windows for architectural aesthetics as well as occupant comfort. "Smart" glass technology uniquely addresses this challenge.

[0004] Smart windows regulate building solar radiation gain by switching from a transparent state when sun is desired for natural lighting, heating, and/or comfort to a tinted (or reflective) state during seasons and/or times of day when building heat gain is problematic. There are a number of chromogenic current technologies that achieve this, including suspended particle, liquid crystal, and electro-, thermo-, gaso-, photo-, and photoelectro-chromic. The operation of these technologies may be subdivided as "active" or "passive." An active device may be controllably actuated and may be programmed by the building occupant. For example, the user may push a button that applies an electrical bias that switches the device state. This is a desirable feature that adds additional expense and complexity due to the need for additional electrical circuitry. Thermogenic and chromogenic layers typically operate passively where solar radiation may induce switching from transparent to tinted due to high energy light (photochromic) or due to a temperature increase in the layer (thermochromic). This results in lower energy consumption than with standard windows, without the added expense of electrical switching found in electrochromic windows but without the feature of dynamic actuation by the user. The smart glass market is relatively young and is projected to be nearly a one billion-dollar annual industry by 2022. Thus, there remains a need for improved smart glass technologies.

SUMMARY

[0005] An aspect of the present disclosure is a device that includes a switchable material and an intercalating species, such that when a first condition is met, at least a portion of the intercalating species is associated with the switchable material and the switchable material is substantially transparent and substantially colorless, and when a second condition is met, at least a fraction of the portion of the

intercalating species is transferred from the switchable material and the switchable material is substantially transparent and substantially colored. In some embodiments of the present disclosure, the switchable material may include ABX_3 , ABX_4 , or A_2BX_6 where A is a first cation, B is a second cation, and X is an anion. In some embodiments of the present disclosure, the first cation may include at least one of a monovalent or a divalent cation. In some embodiments of the present disclosure, the second cation may include a metal that is in at least one of a 2+ oxidation state or a 4+ oxidation state. In some embodiments of the present disclosure, the anion may include at least one of a halide or an oxide/chalcogenide.

[0006] In some embodiments of the present disclosure, the switchable material may include ABX_3 , wherein A is CH_3NH_3 , B includes at least one of lead and/or nickel, and includes at least one of iodine and/or bromine. In some embodiments of the present disclosure, the intercalating species may include at least one of H_2O , NH_3 , RNH_2 , $RR'NH$, ROH , CO , and/or CO_2 , where R and R' are organic functional groups. In some embodiments of the present disclosure, the intercalating species may include at least one of NH_3 , H_2O , and/or CH_3NH_2 . In some embodiments of the present disclosure, the first condition may be achieved when the switchable material attains a first temperature below about 25° C. In some embodiments of the present disclosure, the second condition may be achieved when the switchable material attains a second temperature above about 25° C.

[0007] In some embodiments of the present disclosure, when the device is in the second condition, the switchable material may be colored black, green, or red. In some embodiments of the present disclosure, when the device is in the first condition, the switchable material may be transparent to light having a wavelength substantially within the visible spectrum. In some embodiments of the present disclosure, when the device is in the second condition, the switchable material may absorb at least a portion of light in the visible spectrum. In some embodiments of the present disclosure, the device may further include an intercalating species reservoir, where the switchable material may be in the form of a layer, the intercalating species reservoir may be positioned adjacent to a first surface of the layer, and the fraction of the portion of the intercalating species that is removed from the layer is reversibly stored in the intercalating species reservoir. In some embodiments of the present disclosure, the intercalating species reservoir may include at least one of an empty volume and/or a reversibly adsorbing material.

[0008] In some embodiments of the present disclosure, the device may further include a first transparent conducting oxide layer and a second transparent conducting oxide layer, where the switchable layer is positioned between the first transparent conducting oxide layer and the second conducting oxide layer, and the first transparent conducting layer is positioned between the intercalating species reservoir and the switchable layer. In some embodiments of the present disclosure, the first transparent conducting layer may be configured to allow the reversible transfer of the intercalating species from the switchable layer to the intercalating species reservoir, and from the intercalating species reservoir to the switchable layer.

[0009] In some embodiments of the present disclosure, the device may further include a switching mechanism having a first position and a second position, where when in the first

position, the first condition is met, and when in the second position, the second condition is met. In some embodiments of the present disclosure, the switching mechanism may include a light source, such that when in the first position, the light is off, and when in the second position, the light is on. In some embodiments of the present disclosure, the switching mechanism may include a flow of gas, where the flow of gas is in contact with a surface of the switchable layer, where the first position of the switching mechanism is when the gas has a concentration of the intercalating species above a target concentration, and the second position of the switching mechanism is when the gas has a concentration of the intercalating species less than or equal to the target concentration. In some embodiments of the present disclosure, the switching mechanism may include a voltage source applied to the device, such that the first position of the switching mechanism is when the voltage source does not apply a voltage to the device, and the second position of the switching mechanism is when the voltage source applies a voltage to the device.

[0010] An aspect of the present disclosure is a method that includes reversibly switching a material between a first state and a second state by applying a first condition to the material resulting in the first state characterized by the intercalating of a plurality of species into the material, and applying a second condition to the material resulting in the second state characterized by the removing of at least a portion of the plurality of species from the material, where when in the first state, the material is substantially transparent to light in the visible spectrum, and when in the second state, the material is substantially opaque to light in the visible spectrum. In some embodiments of the present disclosure, the second condition may be achieved by applying radiant energy to the material. In some embodiments of the present disclosure, the first condition may include equilibrating the material to a first temperature between about 0° C. and about 25° C. In some embodiments of the present disclosure, the second condition may include equilibrating the material to a second temperature above about 35° C. In some embodiments of the present disclosure, the method may further include, when removing the at least a portion of the plurality of species, transporting the at least a portion of the plurality of species to a species reservoir,

DRAWINGS

[0011] Exemplary embodiments are illustrated in the referenced figures of the drawings. It is intended that the embodiments and figures disclosed herein are to be considered illustrative rather than limiting.

[0012] FIG. 1 illustrates an example of a perovskite, which may be used as a switchable material, according to some embodiments of the present disclosure.

[0013] FIG. 2 illustrates a switchable material that is reversibly switchable between a first state that is transparent **200** and a second state **210** that is opaque, according to some embodiments of the present disclosure.

[0014] FIG. 3 illustrates a switchable layer that is reversibly switchable between a first state **310** that is transparent and a second state **320** that is opaque, according to some embodiments of the present disclosure.

[0015] FIG. 4 illustrates a device, for example a thermochromic window that includes a switchable layer that is reversibly switchable between a first state **310** that is trans-

parent and a second state **320** that is opaque, according to some embodiments of the present disclosure.

[0016] FIG. 5 illustrates a device, for example a thermochromic window that includes a switchable layer that is reversibly switchable between a first state that is transparent and a second state that is opaque, according to some embodiments of the present disclosure. (Only the first state **310** of the switchable layer is shown.)

[0017] FIG. 6 illustrates a device, for example a photo-voltaic thermochromic window that includes a switchable layer that is reversibly switchable between a first state that is transparent and a second state that is opaque, according to some embodiments of the present disclosure. (Only the first state **310** of the switchable layer is shown.)

[0018] FIG. 7 illustrates a method for reversibly switching a switchable material between a first transparent state **310** to a second opaque state **320**, according to some embodiments of the present disclosure.

[0019] FIG. 8 illustrates a switchable layer that is reversibly switchable between a first state **100** that is transparent and a second state **110** that is opaque, according to some embodiments of the present disclosure: the top photograph is of a transparent, hydrated MAI_xNiI_y layer deposited on glass before thermal annealing. The bottom photograph is of a MAI_xNiI_y layer after annealing to 50° C. to switch the layer from transparent to tinted (opaque). After cooling, the layer returned to the transparent state **100**.

[0020] FIG. 9 illustrates the FUR spectra of a transparent hydrated MAI_xNiI_y layer as dry N_2 was passed over the layer to transfer the water to the vapor phase and yield a black, tinted MAI_xNiI_y layer, according to some embodiments of the present disclosure.

[0021] FIG. 10 illustrates a switchable layer in its second tinted state having a green color, where the layer is a $(\text{HAI})_x\text{NiBr}_y$ layer formed by drop-casting on a glass substrate layer and annealing to 50° C., according to some embodiments of the present disclosure.

[0022] FIG. 11 illustrates a switchable layer in its second tinted state having a red color, where the layer is a $(\text{HAI})_x\text{NiI}_y$ layer formed by drop-casting on a glass substrate layer and annealing to 50° C., according to some embodiments of the present disclosure.

[0023] FIG. 12 illustrates the FTIR spectra of the switchable layers illustrated in FIGS. 9 and 10.

[0024] FIG. 13 illustrates the absorption spectra of a $\text{CH}_3\text{NH}_3\text{PbI}_3$ switchable layer when in the tinted state and after the introduction of CH_3NH_2 as an intercalating species into the layer ($\text{MAIPbI}_3 \cdot x\text{NH}_3$) to produce the transparent state of the switchable layer, according to some embodiments of the present disclosure.

[0025] FIG. 14 illustrates still-frame images taken from a movie of a passive switching mechanism for switching a $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer between two states by irradiating the layer with a Xenon lamp, according to some embodiments of the present disclosure. The film dynamically switched between transparent and tinted while under light irradiation.

[0026] FIG. 15 illustrates a schematic diagram of PV device design based on a switchable $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer that is reversibly switched using CH_3NH_2 , according to some embodiments of the present disclosure.

[0027] FIG. 16 illustrates photographs of the reversible cycling of a $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer included in a device similar to that illustrated in FIG. 14, according to some embodiments of the present disclosure.

[0028] FIG. 17 illustrates a J-V curve of the device after one tinted-to-transparent color cycle of the $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer illustrated in FIG. 14, according to some embodiments of the present disclosure.

[0029] FIG. 18 illustrates a J-V curve of the device after two tinted-to-transparent color cycles of the $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer illustrated in FIG. 14, according to some embodiments of the present disclosure.

[0030] FIG. 19 illustrates optical and accompanying IR images of a switchable device as the device is heated by illumination and allowed to cool, according to some embodiments of the present disclosure.

[0031] FIG. 20 illustrates the temperature of the device illustrated in FIG. 18 as a function of time after being removed from illumination, according to some embodiments of the present disclosure.

[0032] FIG. 21 illustrates a schematic of a photovoltaic (PV) device design based on a switchable perovskite layer and transparent hole transport octakis(4-methoxyphenyl)-9,9-spirobi[9H-fluorene]-2,2,7,7-tetramine (SPIRO-MeO-TAD) and conducting layers poly(3,4-ethylenedioxythiophene):poly(styrenesulfonate) (PEDOT:PSS) according to some embodiments of the present disclosure.

[0033] FIG. 22 illustrates the absorption and reflection (1-transmission) spectra as a function of wavelength for a complete device similar to that illustrated in FIG. 20, in the tinted state and in the transparent state, according to some embodiments of the present disclosure.

REFERENCE NUMBERS

[0034] 100 . . . organic-inorganic metal halide perovskite
 [0035] 110 . . . cation (A)
 [0036] 120 . . . cation (B)
 [0037] 130 . . . anion (X)
 [0038] 200 . . . switchable material in first state
 [0039] 210 . . . switchable material in second state
 [0040] 220 . . . intercalating species
 [0041] 230 . . . switching mechanism
 [0042] 300 . . . device
 [0043] 310 . . . switchable layer in first state
 [0044] 320 . . . switchable layer in second state
 [0045] 330 . . . intercalating species reservoir
 [0046] 400 . . . device
 [0047] 410 . . . substrate layer
 [0048] 420 . . . intervening layer
 [0049] 430 . . . port
 [0050] 500 . . . device
 [0051] 600 . . . device
 [0052] 610 . . . conductor
 [0053] 620 . . . carrier transport layer
 [0054] 700 . . . method
 [0055] 710 . . . applying first condition
 [0056] 720 . . . applying second condition
 [0057] 1500 . . . photovoltaic (PV) device
 [0058] 1510 . . . TiO_2 layer
 [0059] 1520 . . . fluorine-dope tin oxide (FTO) layer
 [0060] 1530 . . . glass substrate layer
 [0061] 1540 . . . counter electrode
 [0062] 1550 . . . gas space
 [0063] 2000 . . . PV device
 [0064] 2100 . . . transparent conductor layer
 [0065] 2200 . . . hole transport layer
 [0066] 2300 . . . TiO_2 layer

[0067] 2400 . . . FTO layer

[0068] 2500 . . . glass layer

DETAILED DESCRIPTION

[0069] The present disclosure may address one or more of the problems and deficiencies of the prior art discussed above. However, it is contemplated that some embodiments as disclosed herein may prove useful in addressing other problems and deficiencies in a number of technical areas. Therefore, the embodiments described herein should not necessarily be construed as limited to addressing any of the particular problems or deficiencies discussed herein.

[0070] The present disclosure describes the design of devices employing switchable materials that may switch from transparent states to tinted (opaque, reflective) states due to a reversible molecular intercalation mechanism. In addition, in some embodiments of the present disclosure, switchable devices are described that can switch transparency states and also harness solar radiation to provide electricity to the building or grid. As described herein, a switchable material, for example an optical layer, may be intercalated with intercalating species such that the switchable material achieves a first transparent state. Switching from this transparent state to a second, tinted state occurs due to the transport of the intercalating species from the switchable material to a separate and distinct intercalating species reservoir positioned external to the switching material. An intercalating species reservoir can be, for example, a neighboring solid film that reversibly binds the intercalating species, a gas space where the intercalating species exists in the vapor phase, and/or any other suitable material (e.g. gas, liquid, and/or solid) configured for the reversible storage of the intercalating species. In addition to serving as a reservoir and/or receiver for decalated and/or intercalated species, respectively, a gas space may also serve as a sound and/or thermal barrier. A gas space may be above or below atmospheric pressure and may be filled with a chemically inert and/or low-thermal conductivity gas such as argon. Switching of the switchable material between its two states may be induced by an energy input into the device containing the switchable material such as solar radiation and/or any other suitable energy source and/or heat source. Other switching mechanisms may include introducing an electrical bias and/or subjecting the switching material to a mass concentration gradient that drives the intercalating species between the switchable material and the intercalating species reservoir; e.g. by flowing gas over a surface of the switchable material. In some embodiments of the present disclosure, the first state of a switchable material may be transparent to radiation of at least a portion of the visible solar spectrum when intercalating species are intercalated into the switchable material, and while in the second state (tinted) the switchable material may absorb radiation of at least a portion of the visible solar spectrum when the intercalating species have been removed (decalated) from the switchable material and transported, for example, to a intercalating species reservoir.

[0071] In some embodiments of the present disclosure, the switchable material may be constructed of a perovskite. An example of a perovskite is an organic-inorganic metal halide perovskite, illustrated in FIG. 1 An organic-inorganic metal halide perovskite may organize into cubic crystalline structures, as well as other crystalline structures such as tetragonal and orthorhombic, and may be described by the general formula ABX_3 , where X is an anion (130) and A and B are

cations (**110** and **120** respectively), typically of different sizes (A typically larger than B). In a cubic unit cell, the B-cation **120** resides at the eight corners of a cube, while the cation (A) **110** is located at the center of the cube and is surrounded by 6 anions **130** (located at the face centers) in an octahedral $[MX_6]^{4-}$ cluster (unit structure). Typical inorganic perovskites include calcium titanium oxide (calcium titanate) minerals such as, for example, $CaTiO_3$ and $SrTiO_3$. In some embodiments of the present invention, the cation (A) **110** may include a nitrogen-containing organic compound such as an alkyl ammonium compound. A cation (B) **110** may include a metal and an anion **120** may include a halide.

[0072] Additional examples of a cation (A) **110** include organic cations and/or inorganic cations. Depending on the number of organic groups, the cation may be a primary (1), secondary (2), tertiary (3), or quaternary (4) ammonium. The groups may be alkyl groups. Further examples of organic cations (A) **110** include methylammonium ($CH_3NH_3^+$), ethylammonium ($CH_3CH_2NH_3^+$), propylammonium ($CH_3(CH_2)_2NH_3^+$), butylammonium ($CH_3(CH_2)_3NH_3^+$), and/or any other suitable nitrogen-containing organic compound. In other examples, a cation (A) **110** may include an organic component with an amidinium group. For example, a cation (A) **110** may be formamidinium ($NH_2CH=NH_3^+$) and/or acetamidinium ($NH_2C(CH_3)=NH_3^+$).

[0073] A cation (A) **110** may include an organic constituent in combination with a nitrogen constituent. In some cases, the organic constituent may be an alkyl group such as straight-chain, or branched, hydrocarbon group having from 1 to 20 carbon atoms. In some embodiments, an alkyl group may have from 1 to 6 carbon atoms. Examples of alkyl groups include methyl (C_1), ethyl (C_2), n-propyl (C_3), isopropyl (C_3), n-butyl (C_4), tert-butyl (C_4), sec-butyl (C_4), iso-butyl (C_4), n-pentyl (C_5), 3-pentyl (C_5), amyl (C_5), neopentyl (C_5), 3-methyl-2-butyl (C_5), tertiary amyl (C_5), and/or n-hexyl (C_6). Additional examples of alkyl groups include n-heptyl (C_7), n-octyl (C_8) and the like. The organic constituent may also be an aryl groups. Aryl groups may include phenyl, naphthyl, benzyl, and/or their alkylated derivatives, for example, a xylyl group. A cation (A) **110** may include halogenated counterparts to the hydrocarbon groups named above. For example fluoromethyl, chloromethyl, bromomethyl, iodomethyl, fluorobenzyl, chlorobenzyl, bromobenzyl, and iodobenzyl groups. An A-anion may be a metal. In some cases, the metal may be an alkali metal. Examples include cesium, rubidium, potassium, and/or sodium.

[0074] Examples of metal cations (B) **120** include, for example, lead, tin, germanium, transition metals such as nickel, copper, or zinc, and/or any other 2+ valence state metal that can charge-balance the organic-inorganic metal halide perovskite **100**. Examples of an anion **130** include halides: e.g. fluorine, chloride, bromide, iodide and/or astatide. In some cases, the organic-inorganic metal halide perovskite may include more than one anion **130**, for example pairs of halides; chlorine and iodine, bromine and iodine, and/or any other suitable pairing of halides. In other cases, the organic-inorganic metal halide perovskite **100** may include two or more halides of fluorine, chlorine, bromine, iodine, and/or astatine.

[0075] Thus, a cation (A) **110**, a cation (B) **120**, and anion **130** may be selected within the general formula of ABX_3 to produce a wide variety of organic-inorganic metal halide

perovskite **100**, including, for example, methylammonium lead triiodide ($CH_3NH_3PbI_3$), and mixed halogen perovskites such as $CH_3NH_3PbI_{3-x}Cl_x$ and $CH_3NH_3PbI_{3-x}Br_x$. Thus, an organic-inorganic metal halide perovskite **100** may have more than one halogen element, where the various halogen elements are present in non-integer quantities; e.g. x is not equal to 1, 2, or 3. In addition, organic-inorganic metal halide perovskite, like other perovskites, can form three-dimensional (3-D), two-dimensional (2-D), one-dimensional (1-D) or zero-dimensional (0-D) networks, possessing the same unit structure.

[0076] FIG. 2 illustrates a switchable material (e.g. a perovskite) that may be reversibly switched from the switchable material in a first state **200** to the switchable material in a second state **210**, where the material is switched from the first state **200** to the second state **210** by a switching mechanism **230**. In some embodiments of the present disclosure, the first state **200** of a switchable material may be characterized as being significantly transparent, whereas the second state **110** of the switchable material may be characterized as being significantly tinted, opaque, and/or reflective. The first state **200** of a switchable material may be characterized by the switchable material being substantially transparent to light, for example, light in the visible spectrum. The second state **200** of the switchable material may be characterized by the switchable material being substantially tinted, opaque, and/or reflective to light in the visible spectrum where the visible spectrum is between 390 nm to 700 nm for the human eye. In some embodiments of the present disclosure, a switchable material (**200** and **210**) may be reversibly opaque and transparent in any desired spectrum of light, as required by the specific application. For example, a switchable material (**200** and **210**) may be reversibly opaque and transparent in at least one of the ultraviolet, near infrared, mid infrared, and/or far infrared regions of the electromagnetic spectrum. It should also be understood that a transparent switchable material may approach 100% transmission of a portion of the electromagnetic spectrum when in the first transparent state **200**. However, in some embodiments of the present disclosure, a transparent switchable material may transmit less than 100% of a portion of the electromagnetic spectrum when in the first transparent state **200**. Similarly, in some embodiments of the present disclosure a tinted switchable material may approach 100% absorption of a portion of the electromagnetic spectrum when in the second tinted state **210**. However, in some embodiments of the present disclosure, a tinted switchable material may absorb less than 100% of a portion of the electromagnetic spectrum when in the second tinted state **210**.

[0077] As described above, a switching mechanism **230** may include a switch that reversibly changes the state of a switchable material from a tinted state **210** and a transparent state **200**, for example, by exposing the switchable material to, and/or shielding the switchable material from, a gradient. In some cases a switching gradient may include at least one of a changeable pressure gradient, concentration gradient, temperature gradient, magnetic field gradient, and/or voltage gradient. In some embodiments of the present disclosure, a switching mechanism **230** may be a passive mechanism, for example, an ambient condition such as temperature, pressure, humidity, etc. Thus, when a predefined ambient condition is met, the switchable material may switch from a first transparent state **200** to a second tinted state **210** and vice

versa. For example, a switching mechanism **230** may be defined by a target condition; when the switchable material is at or below the target condition, the switchable material may be in a first transparent state **200**, and when the switchable material is above the target condition, the switchable material may be in a second tinted state **210**. In some embodiments of the present disclosure, a switchable material may be in a first transparent state when the switchable material is at or above a target condition and in a second tinted state when the switchable material is below the target condition. For example, a switchable material (**200** and **210**) may have a switching mechanism **230** that is a transition of at least one condition of the switchable material (**200** and **210**) from a first condition to a second condition, from a first range of conditions to a second range of conditions, and/or the transition of a condition through some target condition.

[0078] Thus, a switching mechanism **230** may be the transition of a temperature, a pressure, a humidity, a concentration, and/or a voltage of the switchable material (**200** and **210**) from a first condition to a second condition, from a first range of conditions to a second range of conditions, and/or a transition through some target condition. In some embodiments of the present disclosure, a switching mechanism **230** may be a transition of a bulk temperature and/or local temperature of the switchable material (**200** and **210**) through a target temperature between about 0° C. and about 50° C. In some embodiments of the present disclosure, a switching mechanism **230** may be a transition of a pressure of the switchable material (**200** and **210**) through a target pressure between about 0 torr and about 760 torr (gauge total pressure). In some embodiments of the present disclosure, a switching mechanism **230** may be a transition of a concentration of a gas that is in physical contact with a switchable material (**200** and **210**) through a target concentration. In some embodiments of the present disclosure, a switching mechanism **230** may be a transition of a voltage applied to a switchable material (**200** and **210**) through a target voltage. Thus, a switching mechanism **230** may be passively activated by the natural changes occurring to the environment in which the switchable material (**200** and **210**) is located, such that the switching mechanism **230** may be a passive change and/or transition of some condition of the switchable material (**200** and **210**). Or a switching mechanism **230** may be actively activated by a user inducing changes to the environment in which the switchable material (**200** and **210**) is located and/or to the switchable material (**200** and **210**). For example, a user may turn on a device that applies heat to a switchable material (**200** and **210**) such that a temperature of the switchable material (**200** and **210**) transitions through a temperature that results in the switchable material to switch from a first transparent state **200** to a second tinted state **210** and/or vice versa.

[0079] Referring again to FIG. 2, in some cases, a switching mechanism **230** may be a concentration gradient and may include manipulating a flow of mass (not shown) that is in contact with at least one surface of the switchable material (**200** and **210**) to affect the driving force of mass-transfer of the intercalating species **220** between the switchable material and flow of mass. A flow of mass may be, for example, a gas stream of an inert gas (e.g. argon, helium, etc.) A relatively low concentration of the intercalating species **220** in the gas stream may provide sufficient driving force for mass-transfer such that intercalating species **220** contained in the switchable material in the first state **200**

decalate (e.g. are removed) from the switchable material and diffuse into the gas stream resulting in the switchable material switching from its first transparent state **200** to its second tinted state **210**. Alternatively, a relatively high concentration of intercalating species **220** in the gas stream (not shown) may provide sufficient driving force for mass-transfer such that that intercalating species **220** contained in the gas stream diffuse from the gas stream and intercalate into the switchable material resulting in the switchable material switching from its second tinted state **210** to its first transparent state **200**. For example, a flow of mass may be a liquid or gel stream (e.g. at least one of acetonitrile, ethylene carbonate, silicone, polyacrylamides, and/or any other suitable compound). A relatively low concentration of the intercalating species **220** in the gas stream may provide sufficient driving force for mass-transfer such that intercalating species **220** contained in the switchable material in the first state **200**, decalate (e.g. are removed) from the switchable material and diffuse into the gas stream (not shown) resulting in the switchable material switching from its first transparent state **200** to its second tinted state **210**. Alternatively, a relatively high concentration of the intercalating species **220** in the gas stream may provide sufficient driving force for mass-transfer, that intercalating species **220** contained in the gas stream diffuse from the gas stream and intercalate into the switchable material resulting in the switchable material switching from its second tinted state **210** to its first transparent state **200**.

[0080] In some embodiments of the present disclosure, the switchable material may be switched from a first transparent state **200** to a second tinted state **210** by applying a pressure gradient. For example, a first transparent state **200** of a switchable material may be achieved by exposing the switchable material to a gas stream having a relatively high absolute pressure and/or partial pressure of intercalating species **220** contained within the gas stream such that the intercalating species **220** intercalate into the switchable material causing it to become transparent (first state **200**). The switchable material in the first transparent state **200** may then be switched to the second tinted state **210** by a pressure gradient having a reduced absolute pressure in the gas stream (not shown) and/or by reducing the partial pressure of the intercalating species **220** contained within the gas stream, causing the intercalating species **220** to diffuse out of the switchable material into the gas stream.

[0081] In some embodiments of the present disclosure, the switchable material may be switched from a first transparent state **200** to a second tinted state **210** by applying a voltage gradient. For example, switching a switchable material from a first transparent state **200** to a second tinted state **210** may be achieved by exposing the switchable material to a thermal source, such that the thermal source transfers sufficient energy to the switchable material to cause a temperature increase in the switchable material, such that the higher temperature causes the removal of at least some of the intercalating species from the switchable material. The thermal source may cause the switchable material to reach a temperature of greater than about 0° C. for switching the switchable material from a first transparent state **200** to a second tinted state **210**. In some embodiments of the present disclosure, a switchable material may reach a temperature between about 0° C. and about 100° C. to cause at least a portion of the intercalating species to diffuse out of the switchable material to cause the switchable material to

switch from a first transparent state **200** to a second tinted state **210**. In some embodiments of the present disclosure, a switchable material may reach a temperature between about 0° C. and about 50° C. to cause at least a portion of the intercalating species to diffuse out of the switchable material to cause the switchable material to switch from a first transparent state **200** to a second tinted state **210**. Such a switching temperature may be a localized temperature and/or a bulk temperature of the switchable material.

[0082] A thermal source may include a hot plate, resistively heated transparent conductor, and/or any other suitable heating device that may transfer energy from the thermal source to the switchable material (**200** and **210**) by convective, conductive, and/or radiant heat-transfer. The heat source may be a light source. The light source may be the sun, a laser, an incandescent lamp, and/or an LED, etc. Removing or reducing the intensity of the light provided by a thermal source may switch the switchable material back from the second tinted state **200** to the first transparent state **210**. The thermal source may cause the switchable material to reach a temperature of less than about 50° C. to switch the switchable material from the tinted state **210** to the transparent state **200**. In some embodiments of the present disclosure, a switchable material may reach a temperature of less than about 40° C. to cause at least a portion of the intercalating species to diffuse into the switchable material to cause the switchable material to switch from the second tinted state **210** to the first transparent state **200**. In some embodiments of the present disclosure, a switchable material may reach a temperature between about 0° C. and about 30° C. to cause at least a portion of the intercalating species to diffuse into the switchable material to cause the switchable material to switch from the second tinted state **210** to the first transparent state **200**. Such a temperature may be a localized temperature and/or a bulk temperature of the switchable material.

[0083] In some embodiments of the present disclosure, the switchable material (**200** and **210**) may be switched from a first transparent state **200** to a second tinted state **210** by applying a voltage gradient. For example, switching from a first transparent state **200** to a second tinted state **210** may be achieved by exposing the switchable material to a voltage source to decalate at least a portion of the intercalating species **220** from the switchable material to yield the second tinted state **210** of the switchable material. The voltage source may achieve a voltage of less than 10 V for switching the switchable material from a first transparent state **200** to a second tinted state **210**. Removing, reducing the intensity, or reversing the polarity of the voltage source may switch the switchable material back from the second tinted state **210** to the first transparent state **200**. The voltage source may achieve a voltage of less than 9 V for switching the switchable material from the second tinted state **210** to the first transparent state **200**.

[0084] Examples of intercalating species **220** that may reversibly intercalate into and decalate from a switchable material (**200** and **210**) include neutral molecules, charged molecules, charged atoms, and/or any other suitable compound capable of reversibly intercalating into and out of the switchable material. In some embodiments of the present disclosure, intercalating species may be less than 1 nm in diameter. Neutral molecules may include at least one of H₂O, NH₃, RNH₂, RR'NH, ROH, hydrazine (N₂H₂), pyridine, a diamine, SO₂, SO₃, a hydrogen halide (e.g. HCl,

HBr, HI), CO, and/or CO₂, where R and R' are organic functional groups. Charged molecules may include at least one of nitrite, isothiocyanate, cyanide, azide, hydrazinium, hydroxide, oxalate, alkylammoniums, amidiniums, and/or pyridinium. Charged atoms may include at least one of an iodide, a bromide, a chloride, a fluoride, a sulfide, and/or an oxide. Intercalating species may include any other atom, molecule, and/or compound capable of reversible mass-transfer into and out of the switchable material (**200** and **210**).

[0085] Referring again to FIG. 2, in some embodiments of the present disclosure, a switchable material (**200** and **210**) that may be switched from a first transparent state **200** to a second tinted state **210** may include methylammonium nickel iodide (M(A)_xNiI_y, where MA=A, Ni=B, and I=X), hexylammonium nickel bromide ((HA)_xNiBr_y, where HA=A, Ni=B, and Br=X), hexylammonium nickel iodide ((HA)_xNiI_y, where HA=A, Ni=B, I=X, and 1≤x<18 and 3≤y<6), methyl ammonium lead iodide (CH₃NH₃PbI₃, where CH₃NH₃=A, P=B, and I₃=X), and/or a mixed cation/anion compound such as FA_{0.9}Cs_{0.1}Pb_{0.5}Sn_{0.5}I₂Br, where FA=A, Cs=A, Pb=B, Sn=B, I=X, and Br=X. FIG. 2 illustrates that, for an example of a switchable material (**200** and **210**) constructed of a perovskite, while the switchable material is in a first transparent state **200**, the intercalating species **220** may be arranged within the crystal structure of the perovskite. While in a first transparent state **200**, at least some of the intercalating species **220** may be arranged between the anions **130** defining the corners of the octahedral clusters (unit structures) of the perovskite crystal structure and/or the intercalating species **220** may be positioned within the planes defining the octahedral clusters (unit structures) of the perovskite crystal structure. While in a perovskite switchable material is in its second transparent state **210**, the intercalating species **220** may be substantially absent from the perovskite's crystal structure, having diffused out of the switchable material into the surrounding environment (e.g. an adjacent, neighboring, and/or bordering solid, liquid, and/or gas—a suitable intercalating species reservoir).

[0086] Referring to FIG. 3, a switchable layer (**310** and **320**) may be in the form of a film and/or a layer that may be reversibly switched between a first transparent state **310** to a second tinted state **320**, utilizing a switching mechanism **230** similar to those described above. Thus, FIG. 3 illustrates a switchable material that has been shaped into a specific shape or form, in this example, a film and/or layer, in some embodiments of the present disclosure, a switchable layer (**310** and **320**) may be in any other suitable shape and/or form; e.g. spheres, cylinders, rods, and/or cones, etc. In addition, a switchable layer (**310** and **320**) may have at least one textured surface. In the example of FIG. 3, the switchable layer (**310** and **320**) is shown positioned adjacent to an intercalating species reservoir **330**. When the switchable layer is in a first transparent state **310**, intercalating species **220** are intercalated into the switchable layer, as described above for switchable materials. As shown in the example of FIG. 3, while the switchable layer is in the first transparent state **310**, none and/or a fraction of the intercalating species **220** may be contained in an intercalating species reservoir **330**. When switched to the second tinted state **320**, all or substantially all of the intercalating species **220** may diffuse out of the switchable layer into the intercalating species reservoir **330**. However, it should be understood, that in

some embodiments of the present disclosure, removal of intercalating species **220** from the switchable layer and/or the intercalating species reservoir **330** may be less than 100% complete; e.g. when the switchable layer is in a first transparent state **310**, some intercalating species **220** may remain in the reservoir **330**, and when in a second tinted state **320**, some intercalating species **220** may remain in the switchable material.

[0087] In some embodiments of the present disclosure, as described above, an intercalating species reservoir **330** may be a space positioned adjacent to the switchable layer (**310** and **320**) such that the space is filled with at least one of a gas, a liquid, and/or a solid. When an intercalating species reservoir **330** includes a space filled with a gas, the space may be at any suitable pressure, from pressures above atmospheric pressure (e.g. about 760 torr up to 1550 torr) to pressures equal to or approaching absolute vacuum (e.g. about 10^{-11} up to 760 torr). In some embodiments of the present disclosure, a gas may be contained in an intercalating species reservoir **330** (e.g. a space) that is completely enclosed and isolated from the environment external to the device **300**, with no inlet and/or outlet to allow for the transfer of gas and/or intercalating species **330** between the intercalating species reservoir **330** and an environment external to the device **300**. In some embodiments of the present disclosure (see FIG. 4), at least one port **430** may be positioned within the intercalating species reservoir **330** such that the intercalating species **220** may be reversibly added and/or removed from the intercalating species reservoir **330**. In some embodiments of the present disclosure, a intercalating species reservoir **330** in the form of an empty space may be positioned relative to the switchable layer (**310** and **320**) such that there are no physical barriers to mass-transfer between the space and the switchable layer (**310** and **320**).

[0088] Referring to FIG. 4, a gas positioned within an intercalating species reservoir **330** (e.g. an empty space) may be reversibly removed from an intercalating species reservoir **330** by connecting a conduit (not shown) to a port **430** positioned within a wall/boundary of the intercalating species reservoir **330** such that a vacuum may be applied to the intercalating species reservoir **330** (e.g. by a vacuum pump). The vacuum applied to the intercalating species reservoir **330** may provide a driving force that reversibly removes at least a portion of the intercalating species **220** positioned within the switchable layer, thereby switching the switchable layer from a first transparent state **310** to a second tinted state **320**. Reapplication of the original pressure, or removal of the vacuum applied to the intercalating species reservoir **330**, may subsequently result in the re-intercalation of the intercalating species **220** into the switchable layer, returning the switchable layer of the device **400** to its first transparent state **310**.

[0089] FIG. 4 further illustrates that a device **400** incorporating a switchable layer (**310** and **320**) may include additional features including at least one of a first substrate layer **410a**, a second substrate layer **410b**, and/or an intervening layer **420**. For the example where the device **400** is a window or window application, a substrate layer (**410a** and/or **410b**) may be a solid and transparent substrate layer such as glass and/or a transparent conducting material (e.g. a transparent conducting oxide (TCO)). A TCO layer may carry electrical current to/from the switchable material layer when the switchable material is in the second tinted state

310. Such a TCO layer may be porous, dense, and/or patterned and may include but is not limited to: metal, doped metal oxides, and/or carbon-based materials such as graphite, carbon nanotubes, and/or graphene. A substrate layer (**410a** and/or **410b**) may provide a physical foundation upon which to construct at least some of the other elements of the device **400** such as the switchable layer (**310** and **320**). A TCO layer may provide electrical carrier (electron or hole) transport from the switchable layer (**310** and **320**). In general, a substrate layer **410** may be constructed of a high-transmission material such as glass or flexible polymer that may also be used to encapsulate at least some of the layers described herein. A substrate layer may also include a low emissivity (low- ϵ) coating to regulate the amount of ultraviolet and infrared solar radiation from passing through the substrate layer. An additional carrier transport layer may block the transport of one carrier and facilitate the transport of the other.

[0090] In some embodiments of the present disclosure, an intervening layer **420** may be substantially transparent and may provide the function of a switching mechanism **230**, for example, by acting as switchable heating source (e.g. a resistive heating element that may be actively turned on and off by a user). In some embodiments, an intervening layer **420** may be substantially transparent and may provide the function of a switching mechanism **230**, for example, by acting as switchable electrical current, voltage and/or magnetic biasing source. Thus, an intervening layer **420** may provide an active switching mechanism **230** so that a user may actively and reversibly switch a switchable layer between a first transparent state **310** to a second tinted state **320**.

[0091] FIG. 5 illustrates that some embodiments of the present disclosure may relate to a device **500** containing a switchable layer (only the first transparent state **310** is shown; e.g. with intercalating species **220** intercalated into the switchable layer) having more than one intercalating species reservoirs. In this example, the device **500** includes a second intercalating species reservoir **330b** with a first intercalating reservoir **330a** positioned between the second intercalating species reservoir **330b** and the switchable layer **310**. The point of FIG. 5 is that, although the figures provided herewith illustrate examples of devices having specific types of layers, numbers of layers, in specific arrangements, the specific types of layers, number of layers, and arrangements will be determined by each individual device's design requirements. All of these potential arrangements are intended to fall within the scope of the present disclosure.

[0092] FIG. 6 illustrates a device **600** that includes a switchable layer (only the first transparent state **310** is shown; e.g. with intercalating species **220** intercalated into the switchable layer) such that the device may perform as switchable window or window application that may reversibly switch from a transparent state **310** to a tinted state (not shown). In addition, the device **600** contains at least some elements that enable the device **600** to function as a photovoltaic device capable of generating power when exposed to light (not shown). Thus, in some embodiments of the present disclosure, a device **600** may include at least one of a first conductor **610a** (e.g. fluorine-doped tin oxide, a second conductor **610b** (e.g. PEDOT:PSS), and/or one or more carrier transport layers **620** (e.g. titanium oxide, tin oxide, molybdenum oxide, phenyl-C61-butyric acid methyl ester

(PCBM) and/or SPIRO). In some embodiments of the present disclosure, a carrier transport layer **620** may be an electron transport layer (ETL), where the ETL may be an optional transparent layer that may be used to extract photogenerated electrons and block hole transport from the switchable material and/or layer. ETL materials that may be used in some embodiments of the present disclosure are low-work function inorganic oxides such as doped TiO_2 , SnO_x , and/or ZnO as well as organics—polymers, fullerenes, and/or derivatives such as Phenyl-C61-butiric acid methyl ester (PCBM). In some embodiments of the present disclosure, a carrier transport layer **620** may be a hole transport layer (HTL), where the HTL may be an optional transparent layer used to extract photogenerated holes and block electron transport from the switchable material and/or layer. HTL materials that may be used in some embodiments of the present disclosure are inorganic semiconductors such as copper iodide and copper thiocyanate. HTL materials may also include organic conductors such as poly(3-hexylthiophene-2, 5-diyl) (P3HT), octakis(4-methoxyphenyl)-9,9-spiro[9H-fluorene]-2,2,7,7-tetramine (SPIRO-MeOTAD), and/or poly(3,4-ethylenedioxythiophene):poly(styrenesulfonate) (PEDOT:PSS). Nanomaterials such as carbon nanotubes, graphene, and quantum dots may also be used to construct an HTL.

[0093] In some embodiments of the present disclosure, a device containing a switchable material that may be switched between a first transparent state to a second tinted state may be in a switchable hydrophobicity layer. A switchable hydrophobicity layer may be transparent while the device is in the transparent state. It may serve as a solid-state alternative to a gas space as an adjacent layer for intercalating species to transfer to. The switchable hydrophobicity layer may be switched from hydrophobic to hydrophilic in order to transfer intercalating species from the switchable optical and/or absorber layer. The intercalating species transferred from the optical or absorber layer when in the hydrophilic state, and return to the switchable hydrophobicity layer after being switched to the hydrophobic state.

[0094] A switchable hydrophobicity layer may be provided by a number of materials in response to stimuli such as pH, solvent, temperature, light, and/or electrical bias. These materials may be semiconductor oxides such as WO_3 , TiO_2 , ZnO , SnO_2 , V_2O_5 , and/or Ga_2O_3 , which may reversibly switch between superhydrophilic and superhydrophobic by switching their surface chemical environment between oxygen vacancies and hydroxyl groups and/or due to oxidation/reduction of the material using light irradiation, electric fields, and/or temperature gradients. A switchable hydrophobicity layer may also be organic. These may include transparent “thermoreponsive” materials that are hydrophobic at room temperature and hydrophilic at elevated temperature, including polymers such as poly(N-isopropylacrylamide) (PNIPAAm), poly(ϵ -caprolactone), as well as carbon-based materials such as graphene and/or nanotubes. Other materials that may provide suitable hydrophobicity layers include UV/visible-responsive polymers that switch from superhydrophobic to superhydrophilic upon irradiation; e.g. include poly(HFBMA-r-BH-M-graft-SPMA), azobenzene, spiropyran, and/or their derivatives. An electric field may also reversibly switch films from hydrophobic to hydrophilic. Electro-responsive self-assembled monolayers and polymers such as polythiophene films and microstructured polypyrrole, among others, may be used. “Hydropho-

bic gating” resulting from the application of a bias across a nanoporous polyethylene terephthalate (PET) film and/or carbon nanotube paper may also be utilized. Electrochemical reduction/oxidation is another effective switching method in materials such as PEDOT, polyaniline, and/or polypyrrole. Layers of nanoparticles may be used in a switchable hydrophobicity layer. A reversible hydrophobicity change may result by the oxidation/reduction of the nanoparticle, and/or the ligands at the nanoparticle surface may be switched to tune the hydrophobic/hydrophilic properties. These nanoparticles may be composed on materials that absorb in the infrared to prevent the thermal energy gain of infrared light missed by the bandgap of the photovoltaic absorber.

[0095] FIG. 7 illustrates a block flow diagram summarizing a method **700** for reversibly switching a device **300** having a switchable layer in a first transparent state **310** to a second tinted state **320** using a switching mechanism **230**. The method **700** may include applying a first condition **710** to at least one element of the device (e.g. the switchable layer), such that the first condition **710** maintains the intercalation of the intercalating species **220** within the switchable layer, such that the switchable layer maintains the first transparent state **310**. In addition, the method **700** may include applying a second condition **720** to at least one element of the device (e.g. the switchable layer), such that the second condition **720** causes the removal of at least a portion of the intercalating species **220** from the switchable layer such that the switchable layer switches from the first transparent state **310** to the second tinted state **320**. As described above, the first condition and/or the second condition may include manipulating the physical conditions of at least one element of the device **300**, including temperatures, pressures, oxidations states, concentrations, and/or flow rates, etc.

[0096] Some advantages that may be provided by some of the embodiments described herein include:

[0097] 1) Switchable layers may be processed from solution for scalable solution processing that may be easily incorporated into current window manufacturing. The layers may be sprayed and used to retrofit existing windows to improve energy efficiency.

[0098] 2) The use of temperature to switch the switchable layers reversibly between a first state and a second state is not fixed and may be tuned to be appropriate for any climate.

[0099] 3) The color of the tinted state may be tuned for an array of aesthetic visible colors and into the infrared. Infrared (IR) absorption is very important for energy-savings to the consumer. Some embodiments disclosed herein show switchable absorption in the near infrared (black coating), the visible spectrum of light (green and red), and in the IR.

[0100] 4) Molecular intercalation chromogenics is characterized by fast transparent-to-tinted switching times due to the small size and high mobility of the intercalating species. Switching can include time scales as short as 1 microsecond and as long as 30 minutes.

[0101] 5) The tinted state of some of the devices described herein may include photovoltaic elements that are shown herein to harness solar radiation and convert it to electricity.

EXAMPLE 1

[0102] This example demonstrates a molecular intercalation mechanism using a nickel halide-based hybrid organic-inorganic perovskite layer as a switchable layer. The nickel

halide-based hybrid organic-inorganic switchable layer was first hydrated (e.g. using water as the intercalating species) and then reversibly switched by transferring the water as a vapor from the switchable layer to a neighboring gas phase, thus switching the switchable layer reversibly from the transparent state (layer having intercalated water) to the tinted state (water substantially removed from the perovskite layer).

[0103] To produce the nickel halide-based hybrid organic-inorganic layers, methylammonium iodide, $\text{CH}_3\text{NH}_3\text{I}$ (MAI), was first synthesized by reacting 27.86 ml CH_3NH_2 (33% in ethanol) and 30 ml HI (57 wt. % in water, Aldrich) in a 250 ml round-bottom flask at 0° C. for about 4 hours with stirring. The precipitate was recovered by evaporation at 55° C. for about 1 hour in a rotovap. MAI was dissolved in ethanol, recrystallized from diethyl ether, and dried at 60° C. in a vacuum oven for about 24 hours. Hexylammonium iodide (HAI) and hexylammonium bromide (HABr) were produced using the same procedure and molar ratios as MAI. 1 M precursor solutions were prepared by adding NiI_2 (Aldrich) and MAI to water. MAI_xNiI_y layers were produced by depositing the 1 M precursor solution composed of MAI and NiI_2 in water onto a UV-ozone-treated (5 min) glass substrate layer and spinning at 1000 rpm for 15 seconds.

[0104] FIG. 8 illustrates the thermochromic behavior of the resultant switchable MAI_xNiI_y layer. The as-deposited switchable layer appears in a first transparent state **310**, corresponding to the first state of the switchable material. The layer was optically transparent until it was heated on a hot plate to about 50° C., which actively switched the layer to the second tinted state **320**, corresponding to the second state of the switchable material. This effect was reversible, as the MAI_xNiI_y layer quickly (~60 s) returned to the transparent state after removal of the device from the hotplate and placement of the device onto a room temperature surface.

[0105] Water intercalation was the source of the color change in the switchable layer. This was demonstrated by drop-casting the precursor solution onto an attenuated total reflectance (ATR) crystal and sealing the resulting layer in a glass chamber. The resultant spectra are shown in FIG. 9. The initial spectrum (solid line) clearly shows a significant resonance due to the O—H stretching modes of water at $\sim 3200\text{ cm}^{-1}$. As dry N_2 was passed over the layer, the intercalating water was transferred to the gas phase and can be observed as the O—H modes gradually disappear with time (dashed lines). The data also show that the same result obtained by thermally annealing the switchable layer may be obtained by flowing dry nitrogen gas over the switchable layer, which means the intercalating water was successfully removed from the switchable layer both by temperature means and by providing a concentration gradient to drive mass-transfer (e.g. in the absence of application of a thermal gradient). In addition, the transparent hydrated switchable layer ($\text{MAI}_x\text{NiI}_y \cdot z\text{H}_2\text{O}$) absorbed in the IR region of the solar spectrum and may thus serve as a functional component of a glazing device by decreasing IR transmission from an external environment through the switchable device.

[0106] FIGS. 10, 11, and 12 demonstrate the color tunability of Ni halide-based switchable perovskite layers. Switching MAI for HAI or HABr changes the absorption properties of the layer. A switchable layer cast from a 1 M water solution of HABr and NiBr_2 is shown in FIG. 10. This layer was optically transparent when it is cast (not shown).

Placement of the switchable layer's glass substrate layer on 50° C. hotplate, resulted in the switchable layer changing to green second state **320** after a few seconds. The same phenomenon was observed for layers cast from HAI and NiI_2 , which yielded a red layer second state **320** after annealing to 50° C. on a hotplate (see FIG. 11). Both layers reversibly switched back to transparent when removed from the hotplate and placed on a room temperature surface. The absorption spectra of the two films shown in FIGS. 10 and 11 are shown in FIG. 12. Switching the halide (I for Br) clearly shifts the excitonic absorption from 876 nm to 718 nm. The absorption peak observed at 1600 nm is residual water.

[0107] This example illustrates distinct advantages relative to current thermochromic technology. Firstly, the switchable film was cast from aqueous solution. Water is avoided in the processing of current commercialized thermochromic window technology based ligand exchange. Moreover, the switchable layers that were applied were composed of non-toxic, abundant elements that are color-tunable. The layers were cast from solution, which can be easily scaled and incorporated into existing window manufacturing technology or used to retrofit existing windows. The molecular intercalation mechanism also facilitates fast switching. Films were switched to the tinted state within seconds of increasing the layer temperature, and it was switched to the transparent state in minutes.

EXAMPLE 2

[0108] This example expands the molecule intercalation mechanism to photovoltaic layers based on hybrid organic-inorganic perovskites, such as $\text{CH}_3\text{NH}_3\text{PbI}_3$. In this example, perovskite layers are implemented in smart window technology using passive switching of an switchable optical $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer actuated by simulated solar irradiation, as well as active switching of a $\text{CH}_3\text{NH}_3\text{PbI}_3$ -based photovoltaic device. Additionally, it is shown herein that this actively switched photovoltaic device will operate after "color cycling" the optical $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer.

[0109] To produce $\text{CH}_3\text{NH}_3\text{PbI}_3$ layers, methylammonium iodide, $\text{CH}_3\text{NH}_3\text{I}$ (MAI), was first synthesized by reacting 27.86 ml CH_3NH_2 (33% in ethanol) and 30 ml HI (57 wt. % in water, Aldrich) in a 250 ml round-bottom flask at 0° C. for about 4 hours with stirring. The precipitate was recovered by evaporation at 55° C. for 1 hour in a rotovap. MAI was dissolved in ethanol, recrystallized from diethyl ether, and dried at 60° C. in a vacuum oven for 24 hours. A 0.8 M solution of MAI and PbI_2 (Aldrich) in gamma-butyrolactone (GBL) and dimethylsulfoxide (DMSO) (7:3 v/v) was prepared by stirring at 60° C., for 12 hours. The resulting solution was coated onto a glass substrate layer treated in UV ozone cleaner by spin-coating process at 1,000 and 20 seconds. During the spin-coating step, the substrate layer (around 1 in x 1 in) was treated with toluene drop-casting to remove excess GBL and DMSO.

[0110] The solid curve in FIG. 13 is the absorption spectrum of the resulting film $\text{CH}_3\text{NH}_3\text{PbI}_3$, which has a sharp absorption onset at $\sim 800\text{ nm}$. The layer was switched to the transparent state by placing the film in a glass cuvette sealed with a gas-tight septum, evacuating the cuvette to $\sim 50\text{ mTorr}$ pressure, and injecting 20 mTorr CH_3NH_2 (the intercalating species). The CH_3NH_2 was injected by opening a valve to an enclosed flask containing 100 mL solution of CH_3NH_2 (33% in ethanol) and drawing the vapor from the headspace of the

flask. The $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer switched to transparent immediately (<1 second) after the partial pressure of CH_3NH_2 of 20 mTorr was reached. The absorption spectrum of the transparent intercalated optical layer ($\text{MAIPbI}_3 \cdot x\text{NH}_3$) is shown as the dashed line in FIG. 13.

[0111] Passive switching of the $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer was also demonstrated. The $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer on glass was placed into a custom-built chamber and evacuated to (~ 50 mTorr). The $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer was switched by injecting CH_3NH_2 using the same method described in the previous experiment. The layer was then irradiated with a xenon lamp. Switching from the transparent state to the tinted state was immediately observed (<1 s) in the region of the film that was irradiated, which can be seen in the photographs shown in FIG. 14. This is a thermochromic effect, as the increase in temperature caused the intercalated species in the circular irradiated region of the layer to transfer from the switchable pervovskite layer to the adjacent gas space (the intercalating species reservoir). The process was reversed over the course of about 15 minutes as the $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer and glass substrate layer cooled and returned to the transparent state by intercalation of the CH_3NH_2 molecules into the $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer.

[0112] Optical switching may be achieved even when the $\text{CH}_3\text{NH}_3\text{PbI}_3$ is incorporated as an absorber layer in a photovoltaic (PV) device. An example device design is illustrated in FIG. 15. The PV device **1500** was fabricated using the following procedure: A layer of mesoporous TiO_2 **1510** (~ 300 nm) was spin-coated on c- TiO_2 /fluorine-doped tin oxide (FTO) layer **1520** from ethanol diluted TiO_2 paste, followed by 30 minutes of about 450°C ., annealing. The FTO layer was formed on a glass substrate layer **1530**. $\text{CH}_3\text{NH}_3\text{PbI}_3$ precursor was made of 1.4 M equimolar mixture of MAI and PbI_2 in gamma-butyrolactone (GBL)/dimethyl sulfoxide (DMSO) (7/3 v/v). The substrate layer was spun at 4500 rpm for 50 seconds, and toluene was dispersed as an anti-solvent during the spinning. The resulting film was further annealed at 85°C . for 10 minutes. Finally, 100 nm of gold was deposited as a counter electrode (**1540a** and **1540b**) to complete the device.

[0113] The PV device **1500** was “color cycled” between tinted and transparent states following fabrication as shown in FIG. 15. This was achieved by injecting CH_3NH_2 vapor into the evacuated chamber to change the switchable layer from the first opaque state **320** to the transparent state **310** as described above. The CH_3NH_2 vapor was then removed by flowing N_2 through the chamber and out through an HCl bubbler to remove excess CH_3NH_2 from the PV device **1500**. The film was then “regenerated” by irradiating the film with a xenon lamp to increase the temperature of the PV device **1500** and transfer the CH_3NH_2 back into a gas space **1550** neighboring the PV device **1500**, resulting in a return in the device **1500** to opaque state **320**. This process was captured in a series of photographs illustrated in FIG. 16. Current density-voltage (J-V) characteristics of the device before cycling (see FIG. 17) and after two tinted/transparent cycles (see FIG. 18) demonstrate the device was able to cycle states without losing its functionality. The open circuit voltage was reduced by more than half its original value, but the short circuit current actually increased by nearly 2 mA cm^{-2} .

[0114] This example demonstrates an optical layer that was processed from solution and switched at speeds exceeding existing chromogenic technology by employing the

molecular intercalation mechanism described herein. In this case, CH_3NH_2 , as intercalating molecules, were transferred to and from a switchable $\text{CH}_3\text{NH}_3\text{PbI}_3$ layer to a gas space (intercalating species reservoir) to optically change the switchable layer from a first transparent state to a second tinted state. It is shown herein that the switchable optical layer may be passively switched using a thermochromic mechanism by heating the switchable layer with simulated solar radiation and also, that the switchable layer may be actively switched by pumping gas into a gas space layer. Finally, it was demonstrated that the switchable layer remained photovoltaically active even after color cycling the $\text{CH}_3\text{NH}_3\text{PbI}_3$ -based PV device. FIGS. 17 and 18 show the current-voltage characteristics of the device before (FIG. 17) and after (FIG. 18) two cycles of switching the photovoltaic layer from tinted to transparent.

EXAMPLE 3

[0115] A hermetically-sealed, scaled switchable device was fabricated to demonstrate thermochromic switching of a switchable layer. A 2.5-inch by 2.5-inch glass was washed by sonication in acetone and isopropyl alcohol (~ 10 min each). The substrate layer was treated with UV- O_3 for 15 minutes. The switchable optical absorber layer was deposited on this substrate layer from solution. A 1.2 M solution was formed by combining 206.3 mg formatnadinium iodide (FAI), 608.5 mg lead iodide (PbI_2), 26.9 mg methylammonium bromide (MAB), and 88.1 mg lead bromide (PbBr_2) in a glass vial. 0.8 mL and 0.2 mL of anhydrous diethylformamide and anhydrous dimethylsulfoxide (DMSO) were added to the salt precursors, respectively. The Molar ratios of the salts were 1 FAI: 1.1 PbI_2 : 0.2 MABr: 0.2 PbBr_2 . The salts were dissolved by vortexing for 5 to 10 minutes. Finally, 40 μL of 1.5 M cesium iodide solution was added.

[0116] The solution was spin-coated in a N_2 glovebox by coating the substrate layer and spinning at 1000 rpm for 10 seconds then 5000 rpm for 30 seconds. 0.5 mL of chlorobenzene was dripped over the course of approximately 1 seconds when 12 seconds remained in the spin cycle. The film was anneal films for 1 hour in N_2 a glovebox at 100°C . The film converted to a tinted (brown/black) phase in approximately 60 seconds. About 3 cm of the outside edge of the layer was removed mechanically by scraping it off with a stainless steel razor blade. The edge was cleaned with a Kim Wipe soaked in DMSO.

[0117] The switchable optical absorber layer deposited on glass was encapsulated with an additional, cleaned 2.5-inch by 2.5-inch piece of glass sealed with polyisobutylene (PIB). Strips of RIB were positioned around the edges of the clean piece of glass. 2 mm steel spacers were placed at two corners, and a 1.5 mm (outer diameter) glass capillary was placed at a third corner. Another layer of PIB strips was positioned around the edges of the glass, and the assembly was heated to 120°C . on a hotplate in a N_2 -purged glovebox for 5 minutes to reduce the viscosity of the PIB and allow it to flow. The glass substrate layer with the switchable optical absorber layer was then placed on alignment with the glass/PIB substrate layer with the switchable optical layer facing downward. The entire assembly was then mechanically pressed to seal around the edges of the glass, leaving only the capillary to expose the internal volume to the outside atmosphere.

[0118] Vacuum was pulled (approximately 10^{-3} Torr) through the capillary to remove the atmosphere between the

PIB-sealed glass substrate layers. 28 Torr of CH_3NH_2 was introduced through the capillary followed by N_2 . This atmosphere was hermetically sealed within the glass/PM/glass assembly by using a butane torch to cut and flame-seal the capillary. Photographs of the completed device are shown in FIG. 19 (labeled a-d).

[0119] The optical layer was switched from transparent to tinted by illuminating the device with 150 W incandescent light bulb from a distance of 5.5 cm for 10 minutes. The device was removed from illumination, and optical images were taken in conjunction with infrared (IR) images as a function of time for over 8 minutes. FIG. 19 shows the IR images (lower row) corresponding to the photographic images (top row) for select snapshots in time. The device was 81°C . after being removed from illumination for about 30 seconds, and the switchable optical film remained in the tinted state. The temperature decreased to 33°C . over the course of about 450 seconds as shown in FIG. 20. At this point, the switchable optical layer returned to the transparent state. This example indicates a switching temperature of approximately 35°C . for a partial pressure of CH_3NH_2 of 28 torr.

EXAMPLE 4

[0120] A full photovoltaic device was fabricated that was visibly transparent when a switchable optical absorber layer was in a transparent state 200 by employing doped octakis (4-methoxyphenyl)-9,9-spiro[9H-fluorene]-2,2,7,7-tetramine (SPIRO-MeOTAD) and poly(3,4-ethylenedioxythiophene):poly(styrenesulfonate) (PEDOT:PSS) as a hole transport 2200 layer and a transparent conductor layer 2100, respectively. The complete PV device 2000 is shown in FIG. 21 (only the transparent state 310 of the device is shown).

[0121] A 1-inch by 1-inch glass layer 2500 with patterned fluorine-doped tin oxide (FTO) layer 2400 was washed by sonication in acetone and isopropyl alcohol (~10 minutes each). The FTO layer 2400 was treated with UV-O_3 for 15 minutes. A solution of 0.15 M TAA in 1-butanol (TAA=titanium diisopropoxide bis(acetylacetonate), 75 wt % in IPA, concentration of approximately 2 M) was spin-coated onto the with the following procedure: 700 rpm, 10 seconds; 1000 rpm, 10 seconds; 2000 rpm, 30 seconds. Excess TAA was washed off of the device contact areas using ethanol, and residual solvent was removed from the film by heating it on a hot plate at 125°C . for 2 or more minutes. The TAA film was finally annealed at 500°C . for one hour to produce a TiO_2 layer 2300.

[0122] The switchable optical absorber layer (shown only in the transparent state 200 in FIG. 21) was also processed from solution. The solution included a 1.2 M solution composed of 206.364 mg formamadinium iodide (FAI), 608.5 mg lead iodide (PbI_2), 26.9 mg methylammonium bromide (MABr), 88.1 mg lead bromide (PbBr_2), 0.8 mL and 0.2 mL of anhydrous diethylformamide and anhydrous dimethylsulfoxide was added to the salt precursors. The molar ratios of the salts were 1 FAI: 1.1 PbI_2 : 0.2 MABr: 0.2 PbBr_2 . The salts were dissolved by vortexing for 5 to 10 minutes. Finally, 40 μL of 1.5 M cesium iodide solution was added.

[0123] The solution was spin-coated in a N_2 glovebox by coating the substrate layer and spinning at 1000 rpm for 10 seconds then 3000 rpm for 12 seconds. 0.5 mL of chlorobenzene was dripped over the course of approximately 1 second when 12 seconds remain in the spin cycle. The film

was annealed for 1 hour in a N_2 glovebox at 100°C . The film converted to a tinted (brown/black) phase in approximately 60 seconds.

[0124] Octakis(4-methoxyphenyl)-9,9-spiro[9H-fluorene]-2,2,7,7-tetramine (SPIRO-MeOTAD) solution was prepared with 72 mg of SPIRO, 17.5 μL of 520 mg/mL stock solution of lithium bis(trifluoromethane)sulfonimide (LiTFSI) salt in acetonitrile, and 28.8 μL 4-tertbutylpyridine. The solution was spin-coated onto the perovskite layer at 5000 rpm for 30 s.

[0125] The PV device 2000 was completed by dry transfer of a PEDOT:PSS hole transport layer 2200. PEDOT:PSS (Clevios PH1000) was spin cast onto pre-cleaned and UV-ozone-treated quartz substrate layers and was then dried at 120°C . for 15 minutes. Sulfuric acid (H_2SO_4) treatment was performed by immersing the PEDOT:PSS films coated on the quartz substrate layers in a bath of concentrated H_2SO_4 (>95%) for 10 minutes at room temperature, followed by washing in a bath of deionized water. The films were then dried at 120°C . for 10 minutes. Carrier stamps were prepared by casting PDMS (Sylgard 184, Dow Corning) onto a glass petri dish. The PDMS stamps were then placed onto the H_2SO_4 -treated PEDOT:PSS films, and subsequent peeling away of the PDMS stamps resulted in the transfer of the films onto the PDMS stamps. Finally, H_2SO_4 -treated PEDOT:PSS films were transferred onto the target substrate layers by peeling away the PDMS stamps after annealing the target substrate layers at a temperature between 50 and 70°C . for 2 min. FIG. 22 shows the Absorption and reflection (1-transmission) as a function of wavelength for the complete device in the tinted state (solid line) and in the transparent state (dashed line).

[0126] The foregoing disclosure has been set forth merely to illustrate the invention and is not intended to be limiting. Since modifications of the disclosed embodiments incorporating the spirit and substance of the invention may occur to persons skilled in the art, the invention should be construed to include everything within the scope of the appended claims and equivalents thereof.

1. A device comprising:

a switchable material; and

an intercalating species, wherein:

when a first condition is met, at least a portion of the intercalating species is associated with the switchable material and the switchable material is substantially transparent and substantially colorless, and

when a second condition is met, at least a fraction of the portion of the intercalating species is transferred from the switchable material and the switchable material is substantially opaque and substantially colored.

2. The device of claim 1, wherein the switchable material comprises ABX_3 , ABX_4 , or A_2BX_6 where A comprises a first cation, B comprises a second cation, and X comprises an anion.

3. The device of claim 2, wherein the first cation comprises at least one of a monovalent cation or a divalent cation.

4. The device of claim 2, wherein the second cation comprises a metal that is in at least one of a $2+$ oxidation state or a $4+$ oxidation state.

5. The device of claim 2, wherein the anion comprises at least one of a halide or an oxide/chalcogenide.

6. The device of claim 2, wherein:
the switchable material comprises ABX_3 ,
A comprises CH_3NH_3 ,
B comprises at least one of lead or nickel, and
X comprises at least one of iodine or bromine.
7. The device of claim 1, wherein the intercalating species comprises at least one of H_2O , NH_3 , RNH_2 , $RR'NH$, ROH , CO , or CO_2 , where R and R' are organic functional groups.
8. The device of claim 7, wherein the intercalating species comprises at least one of NH_3 , H_2O , or CH_3NH_2 .
9. The device of claim 1, wherein the first condition is met when the switchable material attains a first temperature below about $25^\circ C$.
10. The device of claim 1, wherein the second condition is met when the switchable material attains a second temperature above about $25^\circ C$.
11. The device of claim 1, wherein when in the second condition, the switchable material is colored black, green, or red.
12. The device of claim 1, wherein when in the first condition, the switchable material is transparent to light having a wavelength substantially within the visible spectrum.
13. The device of claim 1, wherein when the second condition is met, the switchable material absorbs at least a portion of light in the visible spectrum.
14. The device of claim 1, further comprising an intercalating species reservoir, wherein:
the switchable material is in the form of a layer,
the intercalating species reservoir is positioned adjacent to a first surface of the layer, and
the fraction of the portion of the intercalating species that is removed from the layer is reversibly stored in the intercalating species reservoir.
15. The device of claim 14, wherein the intercalating species reservoir comprises at least one of an empty volume or an adsorbing material.
16. The device of claim 14, further comprising:
a first transparent conducting oxide layer; and
a second transparent conducting oxide layer, wherein:
the switchable material layer is positioned between the first transparent conducting oxide layer and the second transparent conducting oxide layer, and
the first transparent conducting layer is positioned between the intercalating species reservoir and the switchable material layer.
17. The device of claim 16, wherein the first transparent conducting layer is configured to allow the reversible transfer of the intercalating species from the switchable material

layer to the intercalating species reservoir, and from the intercalating species reservoir to the switchable material layer.

18. The device of claim 1, further comprising:
a switching mechanism having a first position and a second position, wherein:
when in the first position, the first condition is met, and when in the second position, the second condition is met.
19. The device of claim 18, wherein:
the switching mechanism comprises a light source,
when in the first position, the light is off, and
when in the second position, the light is on.
20. The device of claim 18, wherein:
the switching mechanism comprises a flow of gas,
the flow of gas is in contact with a surface of the switchable immaterial,
the first position is when the gas has a concentration of the intercalating species above a target concentration, and
the second position is when the gas has a concentration of the intercalating species less than or equal to the target concentration.
21. The device of claim 18, wherein:
the switching mechanism comprises a voltage source applied to the device,
when in the first position, the voltage source does not apply a voltage to the device, and
when in the second position, the voltage source applies a voltage to the device.
22. A method comprising:
reversibly switching a material between a first state and a second state by applying a first condition to the material resulting in the first state characterized by the intercalating of a plurality of species into the material; and
applying a second condition to the material resulting in the second state characterized by the removing of at least a portion of the plurality of species from the material, wherein:
when in the first state, the material is substantially transparent to light in the visible spectrum, and
when in the second state, the material is substantially opaque to light in the visible spectrum.
23. The method of claim 22, wherein the second condition is achieved by applying radiant energy to the material.
24. The method of claim 22, wherein first condition comprises equilibrating the material to a first temperature between about $0^\circ C$. and about $25^\circ C$.
25. The method of claim 22, wherein the second condition comprises equilibrating the material to a second temperature above about $35^\circ C$.
26. The method of claim 22, further comprising, when removing the at least a portion of the plurality of species, transporting the at least a portion of the plurality of species to a species reservoir.

* * * * *